



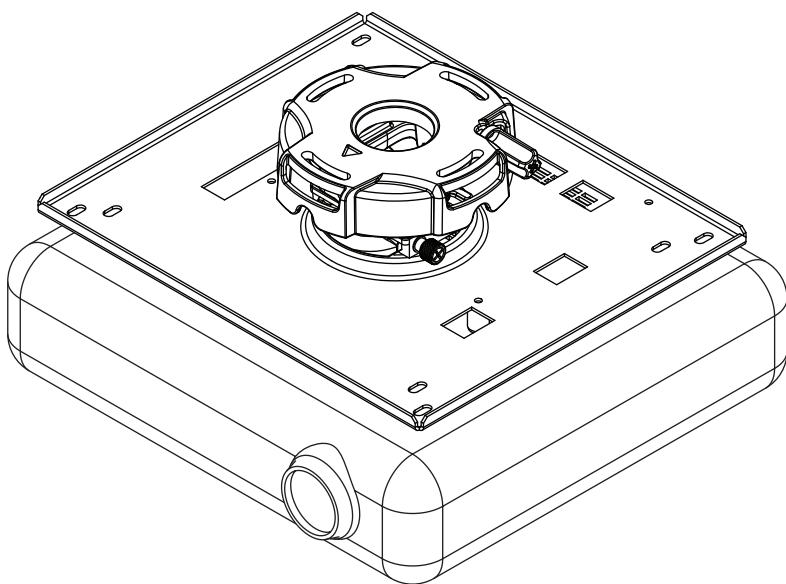

PA600CM

Ceiling Mount for NP-P547UL, NP-P627UL, NP-PV710UL, NP-PV800UL, XP-P601Q-W, and XP-P721Q-W
Projectors



ENG	Compatible model/series*	AEC*, EXT*
-----	-----------------------------	---------------


⚠ WARNING

ENG - This product is designed to be installed on wood joist/beam or solid concrete ceilings. Hardware is included for wood joist/beam and solid concrete installation. Before installing make sure the supporting surface will support the combined load of the equipment and hardware. Screws must be tightly secured. Do not overtighten screws or damage can occur and product may fail. Never exceed the Maximum Load Capacity. Always use an assistant or mechanical lifting equipment to safely lift and position equipment. This product is intended for indoor use only. Use of this product outdoors could lead to product failure or personal injury. Be careful not to pinch fingers when operating the mount. For support please call customer care at 1-800-865-2112.

ENG Symbols




ENG WARNING



ENG Skip to step.



ENG Screws must get at least three full turns and fit snug.










ENG Do not overtighten screws.




ENG Front of mount.

ENG Tools Needed for Assembly.




ENG To properly tighten screws: Tighten until screw head makes contact, then tighten another 1/2 turn. Do not overtighten screws.


1




2



3




4



Parts List		
Description	Qty	Part #
A projector mount assembly	1	055-KPRGU-B-4
B connection block	1	580-1065
C 4mm security allen wrench	1	560-9646
D concrete anchor	2	590-0320
E #14 x 2.5 phillips hex head wood screw	2	5S1-015-C03
F #10-32 x 3/8" serrated socket pin screw	2	520-1151
G #10-32 x 1/4" socket pin screw	1	520-1196
H washer	2	540-1078
I 2mm security allen wrench (not used)	1	560-1097
J adaptor plate 10.7" x 12.5"	1	10018983-RBLK
K M4 x 25mm serrated socket pin screw	4	510-1082
L spacer	4	10018997
M adaptor plate 12" x 10"	1	10005286-RBLK


A (1)

projector mount assembly



B (1)

connection block



I (1)

2mm security allen wrench




C (1)

4mm security allen wrench




D (2)

8mm concrete anchor




E (2)

#14 x 2-1/2" wood screw



F (2)

#10-32 x 3/8"



G (1)

#10-32 1/4"




H (2)

washer



J (1)

adaptor plate




K (4)

M4 x 25mm




L (4)

spacer



M (1)

adaptor plate







1


ENG Wood joist/beam

ENG Concrete Ceiling

ENG Extension Column (not included)



1a



1b






1c-1

1a

⚠ WARNING


ENG - When installing Peerless ceiling mounts on a wood joist/beam covered with gypsum board (drywall), verify that the joists or beams are a minimum of 2" x 4" nominal size. Do not install over gypsum board thicker than 5/8".

1a-1

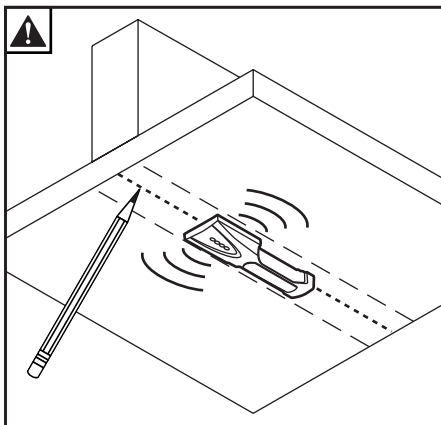


ENG Use stud finder to locate and mark stud center lines.

1a-2




ENG Mark mounting holes on stud center lines.

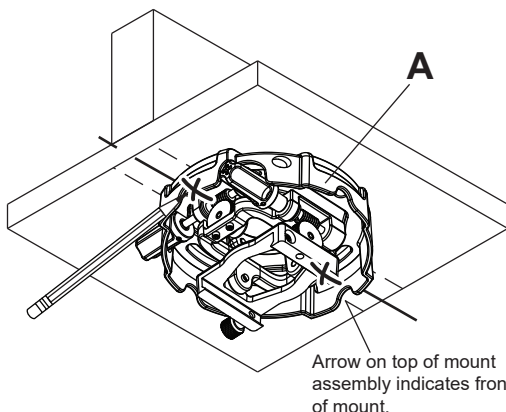


Arrow on top of mount assembly indicates front of mount.

1a-3




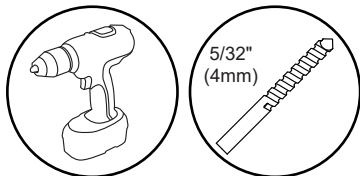


ENG Drill mounting holes into supporting surface (2.5" (64mm) minimum depth required).

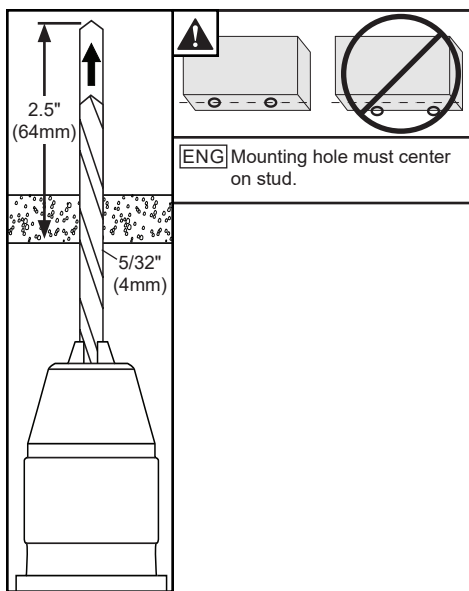

1a-4

ENG Install using wood screws provided.

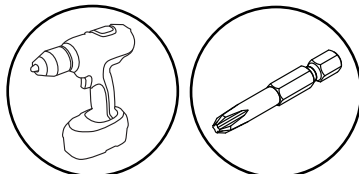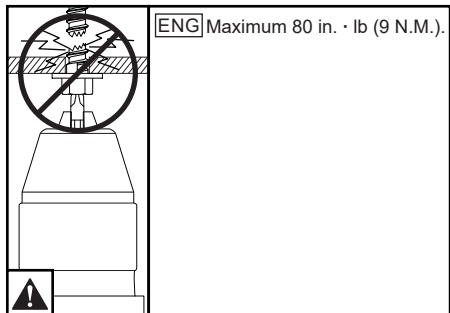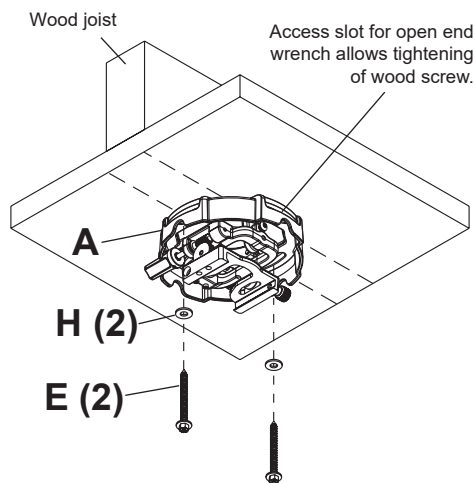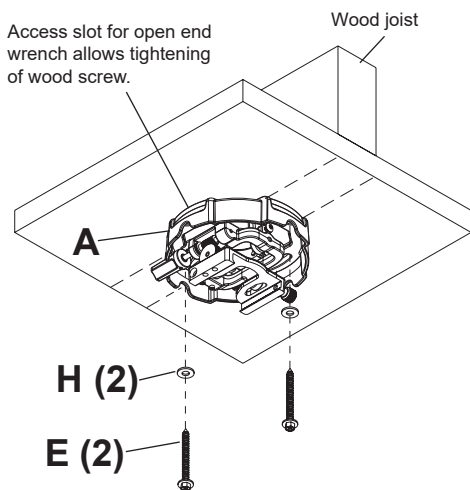


1b


▲ WARNING

ENG - When installing Peerless ceiling mounts on a concrete ceiling, the ceiling must be at least 8" thick with a minimum compressive strength of 2000 psi. Never attach concrete expansion anchors to concrete covered with plaster, drywall, or other finishing material.

1b-1





ENG Mark mounting holes.

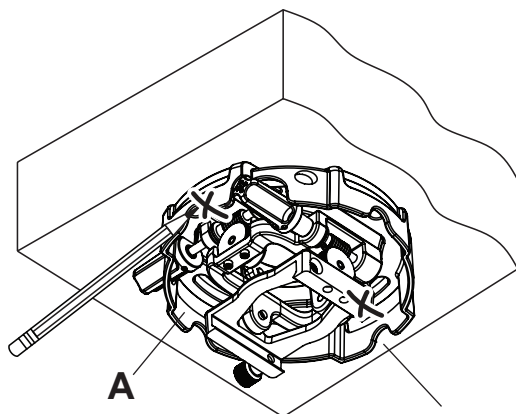



Arrow on top of mount assembly indicates front of mount.

1b-2

ENG Drill mounting holes into supporting surface (2.5" (64mm) minimum depth required).

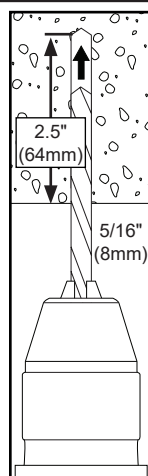



1b-3

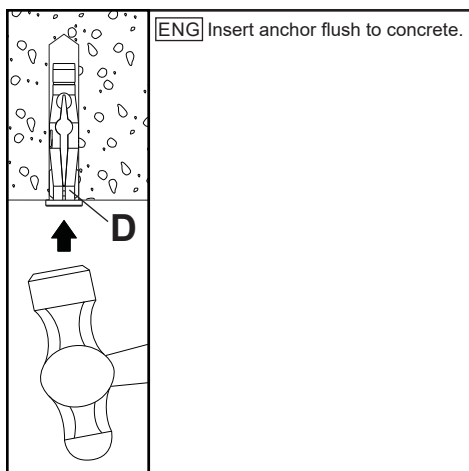
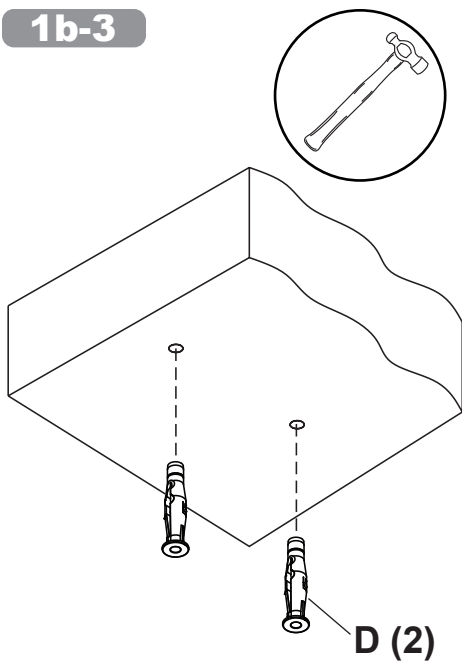


1b-4

ENG Install using concrete anchors and wood screws provided.

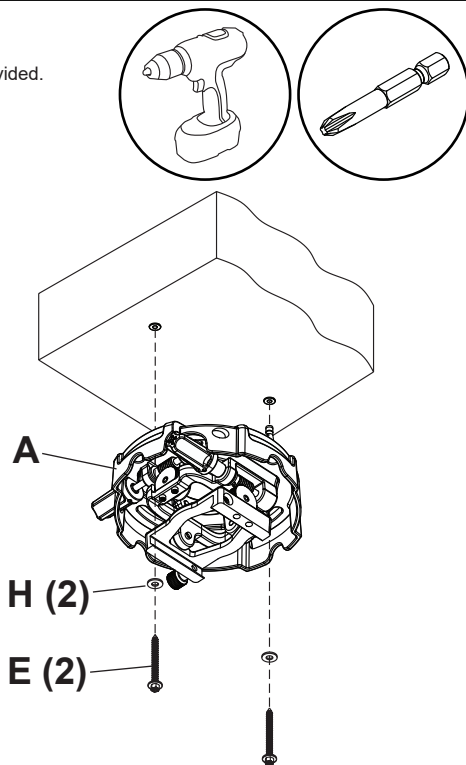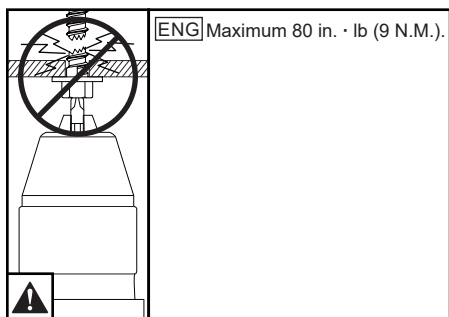


1c-1

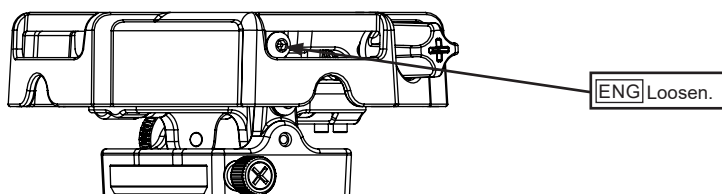




1c-2

ENG Rotate mount at least three full turns onto EXT or AEC series extension column (sold separately).

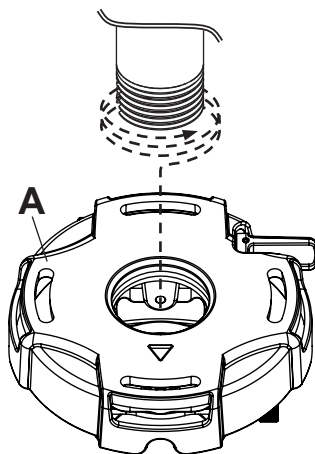


1c-3

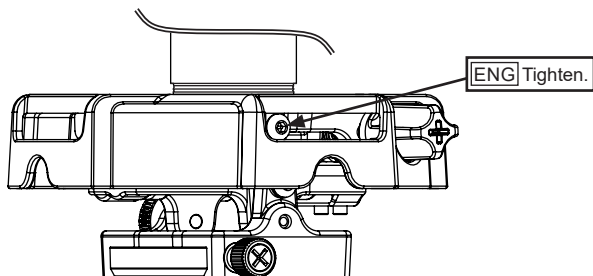

2


For use with
NP-PV710UL, NP-PV800UL,
XP-P601Q-W, and XP-P721Q-W
only.

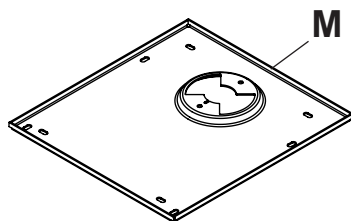


For use with
NP-P547UL and NP-P627UL only.




2a-1

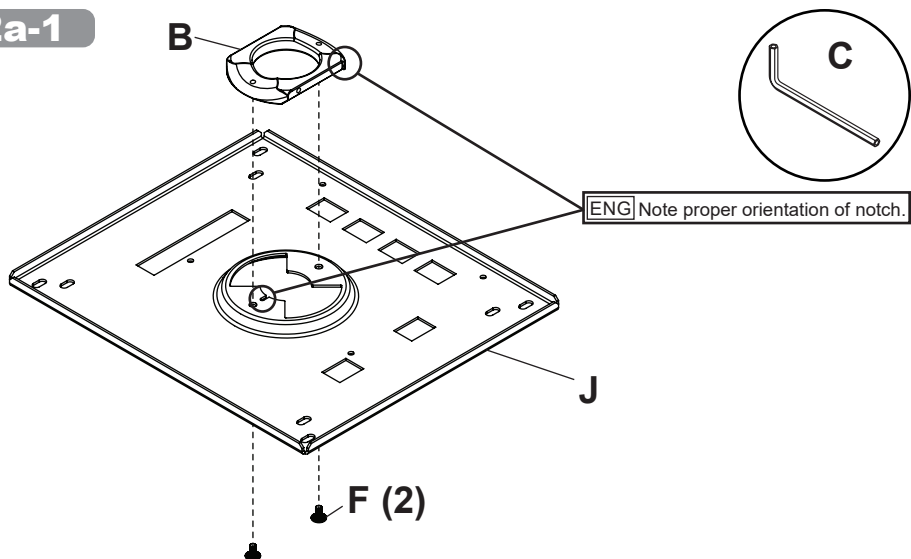


2a-2

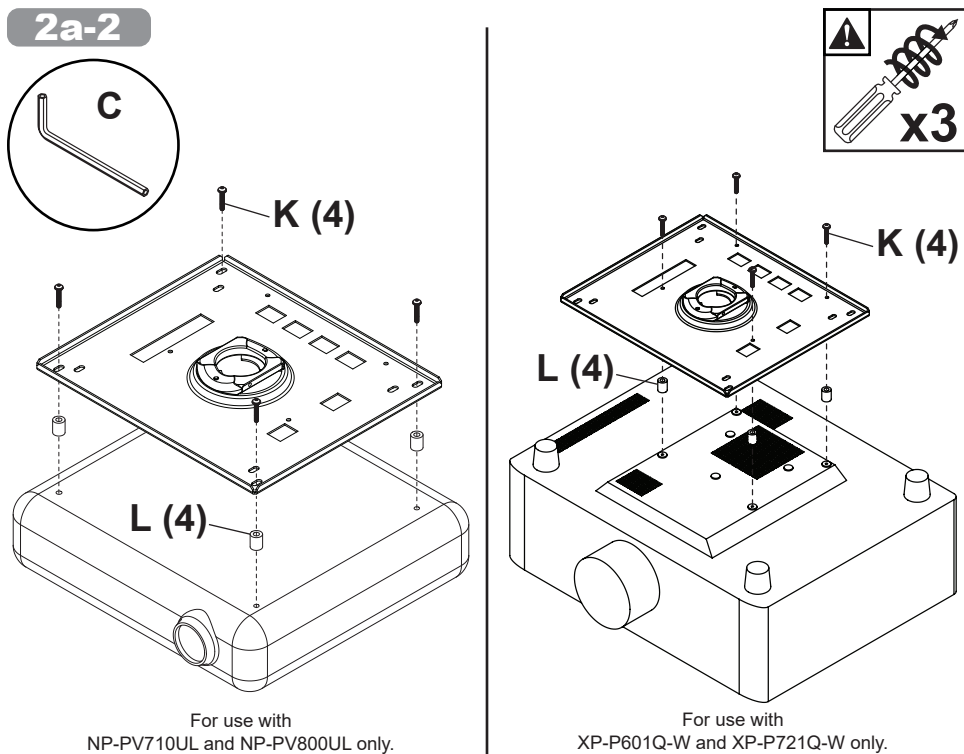


2b-1

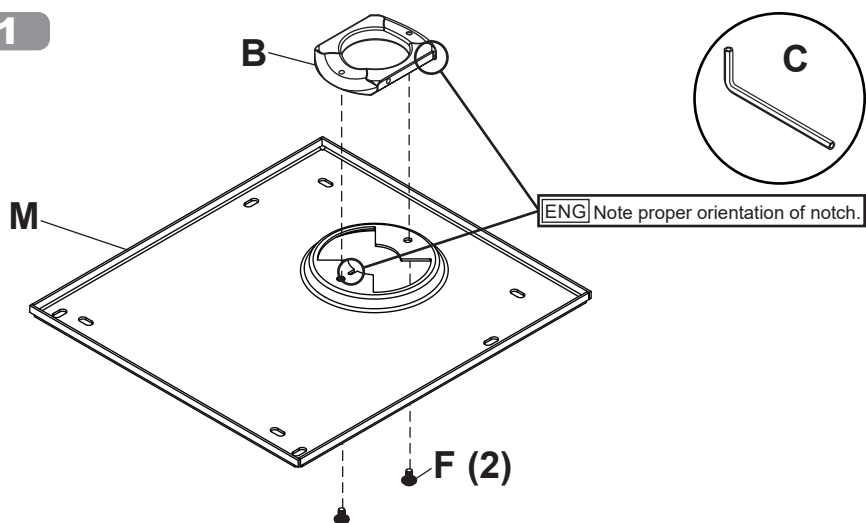


2b-2

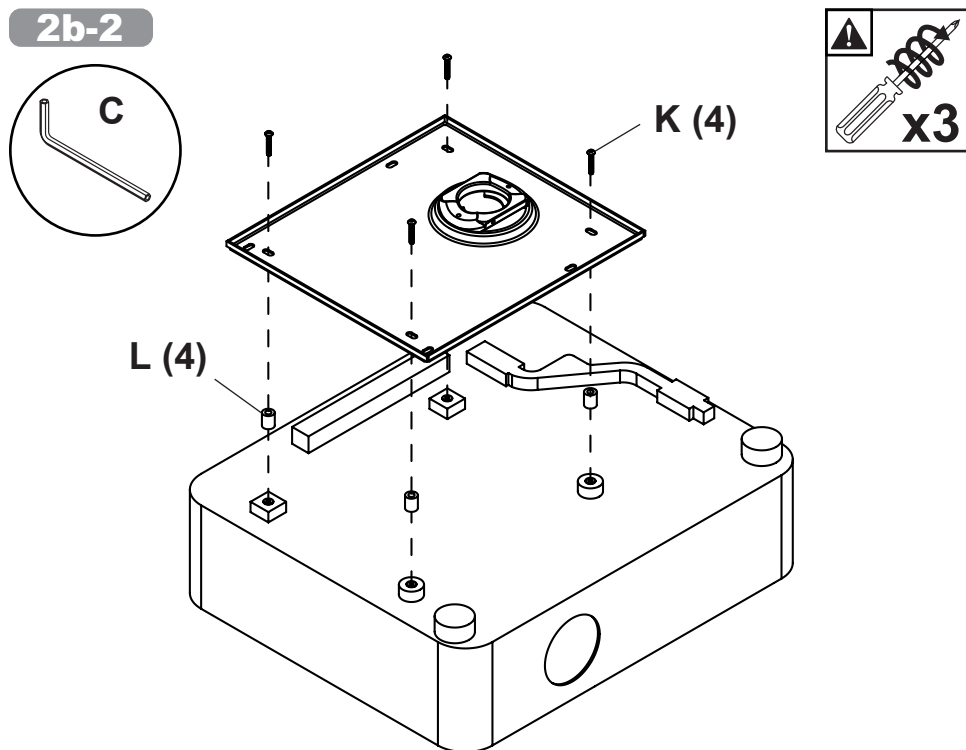

3-1

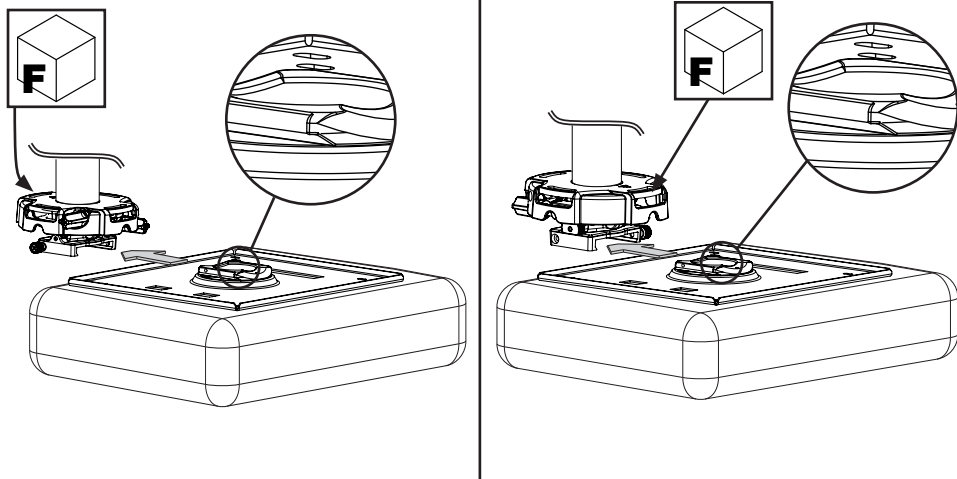


3-2

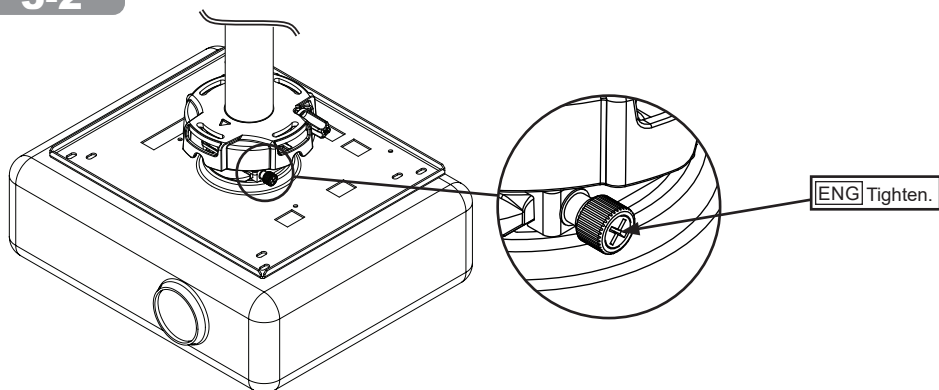




3-3

ENG Optional security screw.


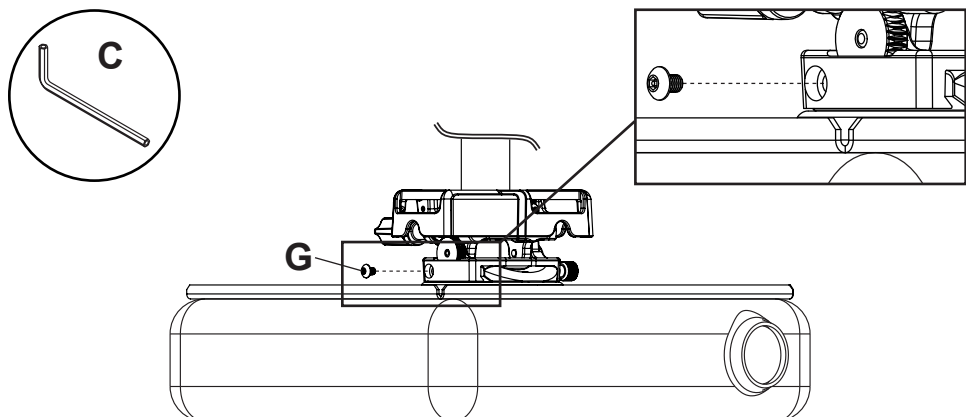




4

ENG Cable management: adjust pitch then route cables as shown.

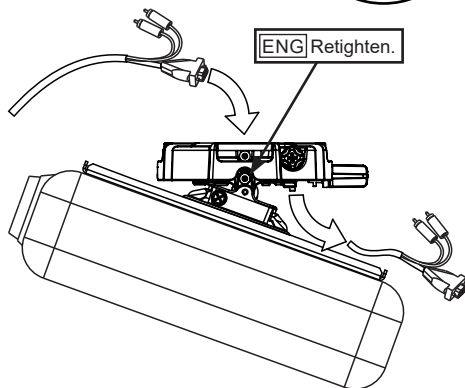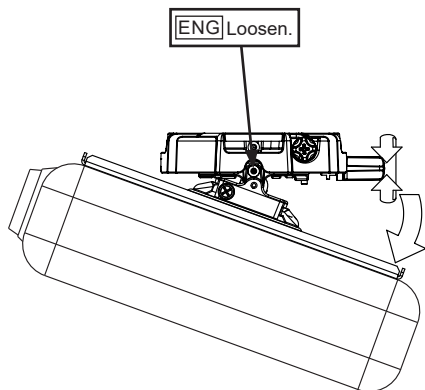


5-1

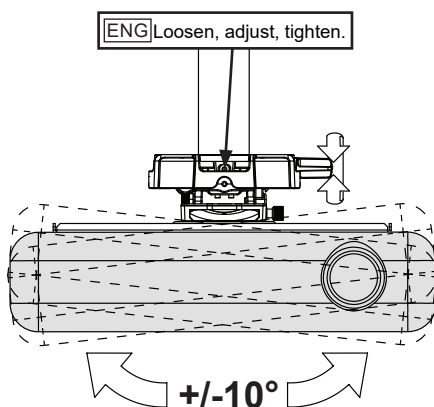


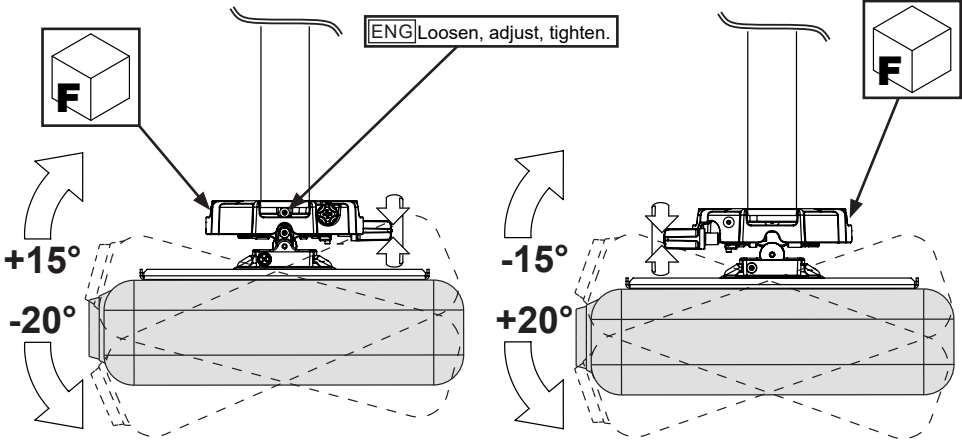



5-3

ENG SWIVEL (YAW) 360° (when attached to an extension column), +/- 15° (when flush mounted).

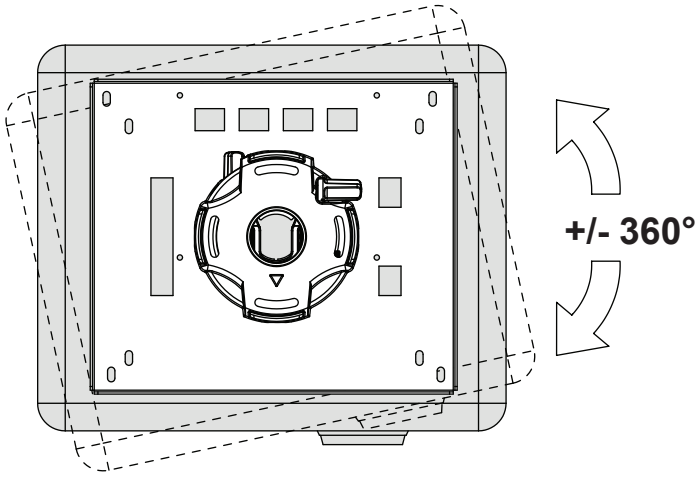

ENG Loosen, adjust, tighten.

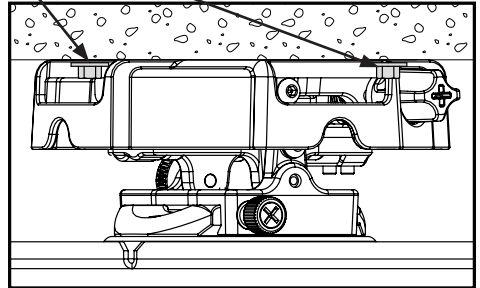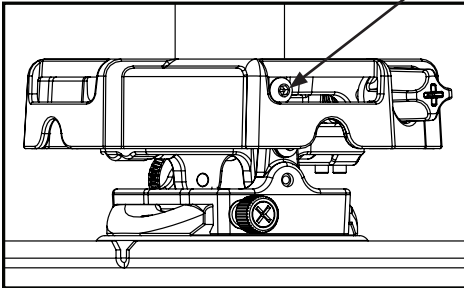

ENG	Warranty	ESP	Garantía	FRN	Garantie	DEU	Garantie	NEL	Garantie
ITL	Garanzia	CES	Záruka	SLK	Záruka	POR	Garantia	TUR	Garanti

www.peerless-av.com/warranty • www.peerless-av.com • www.peerless-av.com/patents

SHARP®

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502, USA
info@peerless-av.com

(800) 865-2112
(630) 375-5100

Peerless-AV EMEA
Unit 2, Curo Park
Frogmore, St. Albans,
Hertfordshire, AL2 2DD
United Kingdom

+44 (0) 1923 200 100

Peerless-AV B.V.
Papendorpseweg 75
3528 BJ Utrecht
The Netherlands

+31 (0) 70 770 8037

Peerless-AV Latin America
Av. de las Industrias 413
Parque Industrial Escobedo
General Escobedo N.L.,
México 66062

+52 (81) 8384-8300