

WT610E Installation Guide

Desktop and Ceiling Mount

v2.4

Contents

Product Description, Lens Specs, Notes and Formulas	Page 1
Diagrams and Distance Charts	
Ceiling Mounted Installation	Page 2
Desktop Setup	Page 3
Cabinet Dimensions	
Top, Front and Right Side	Page 4
Bottom, Back and Left Side	Page 5
Optional Ceiling Mount Dimensions	Page 6
Optional Wall Mount Dimensions	Page 7
Optional Wall Mount Dimensions cont.	Page 8
Input Panel and Control Codes	Page 9



Product Description

Type:	1 chip DMD™ Lens-less projector	Dimensions:	15.0"(W) x 12.3"(H) x 12.3"(D) w/final mirror up
	4 mirror bounce optical system	Weight:	14.1 lbs
Native Resolution:	1024 x 768 (1024x576 for 16:9 screens)	Screen Range:	40" – 100" Diagonal (4:3)
Brightness:	2000 lumens (1500 ANSI)	Fan Noise:	37 dB / 32dB @ 1 meter
Power Consumption:	370W (max)	BTU's:	1262 BTU/hour

Screen/Aspect Ratio

Both 4:3 and 16:9 screens are fully supported with proper aspect ratio control for both type sources using NEC developed scaling technology. By selecting the screen type in the menus, Aspect Ratio control is reconfigured for that screen type.

Notes

- For screen sizes not indicated on the projection charts, use the formulas below.
If the figures on the tables do not match the results of formulas, use the figures in the table.
- All calculations are based on 4:3 aspect ratio.
- Distances are in inches, for millimeters multiply by 25.4.
- Distances may vary ±5%.

Formulas

The Projection Formulas use the image width for calculation. Image width is the same for all aspect ratios, only vertical image size varies. For proper projector placement, determine the image width for a desired screen size. Use the Screen Formulas below to calculate all screen dimensions. Plug the screen width in for "W" in the Projection Formulas. Refer to the diagrams and charts for popular screen sizes on page 2 and 3.

Definitions:

W = Screen width
H = Screen height
B = Vertical distance between projector foot and screen center
C = Throw distance
D = Vertical distance between projector foot and screen bottom
(screen top for ceiling mounted application)

Projection Formulas:

B = $0.6882W + 3.935$
C = $0.4874W - 13.056$
D(4:3) = $0.3132W + 3.935$
D(16:9) = $0.407W + 3.935$

4:3 Screen Formulas:

W = $H \times 4/3$
H = $W \times 3/4$
Screen Diagonal = $W \times 5/4$

16:9 Screen Formulas:

W = $H \times 16/9$
H = $W \times 9/16$
Screen Diagonal = $W \times 18.358/16$


Vertical Position for a 16:9 screen: The Vertical Position adjustment moves the 16:9 image up and down in the unused portion of the 4:3 DLP panel. This adjustment is only available when the projector is set for 16:9 in the "Screen" menu. The range of Vertical Position is dependent on aspect ratio and 3D Reform used. If 3D Reform is not used, the approximate range of vertical position is $\pm 0.167H$ (H =Screen Height) when using a 16:9 screen. (See "Screen Type" and "Position" in user manual)

WT610E Installation Guide

Desktop and Ceiling Mount

Ceiling Mounted Installation

The following diagram shows the relationship between projector position and the screen. Refer to the charts below for data. Distances are in inches. For millimeters multiply by 25.4.

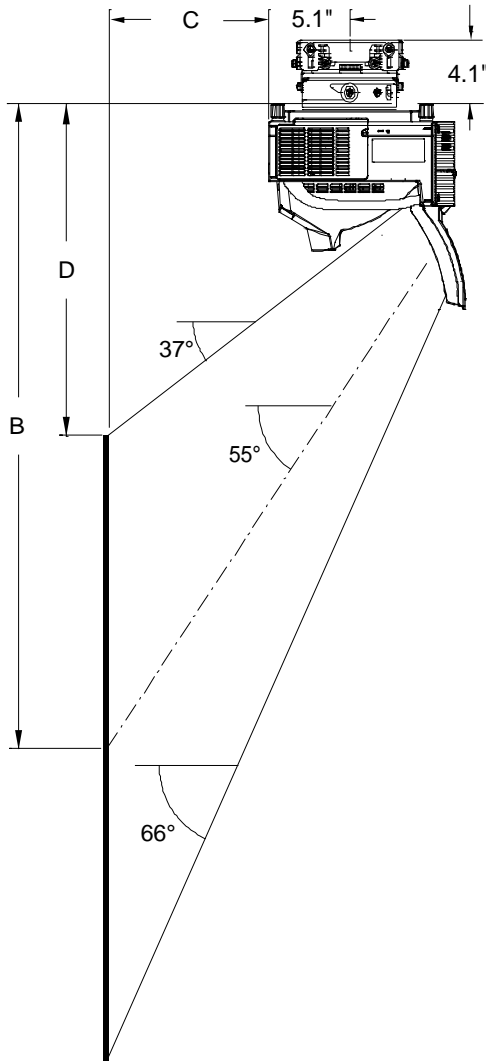

Distance chart for popular 4:3 screen sizes

Image Size (4:3)			B	C	D(4:3)
Diagonal	Width(W)	Height(H)			
inches	inches	inches	inches	inches	inches
40	32	24	26.0	2.5	14.0
48	38.4	28.8	30.4	5.7	16.0
60	48	36	37.0	10.3	19.0
64	51.2	38.4	39.2	11.9	20.0
67	53.6	40.2	40.8	13.1	20.7
72	57.6	43.2	43.6	15.0	22.0
77	61.6	46.2	46.3	17.0	23.2
84	67.2	50.4	50.2	19.7	25.0
90	72	54	53.5	22.0	26.5
94	75.2	56.4	55.7	23.6	27.5
100	80	60	59.0	25.9	29.0

Distance chart for popular 16:9 screen sizes

Image Size (16:9)			B	C	D(16:9)
Diagonal	Width(W)	Height(H)			
inches	inches	inches	inches	inches	inches
37	32	18	26.0	2.5	17.0
40	35	19.7	28.0	4.0	18.2
83	72	40.5	53.5	22.0	33.2
92	80	45	59.0	25.9	36.5

Vertical Position for a 16:9 screen: The Vertical Position adjustment moves the 16:9 image up and down in the unused portion of the 4:3 DLP panel. This adjustment is only available when the projector is set for 16:9 in the "Screen" menu. The range of Vertical Position is dependent on aspect ratio and 3D Reform used. If 3D Reform is not used, the approximate range of vertical position is +/-0.167H (H=Screen Height) when using a 16:9 screen. (See "Screen Type" and "Position" in user manual)


Note: For screen sizes not indicated in the distance charts, use the formulas on page 1.

WT610E Installation Guide

Desktop and Ceiling Mount

Desktop Setup

The following diagram shows the relationship between projector position and the screen. Refer to the charts below for data. Distances are in inches. For millimeters multiply by 25.4.

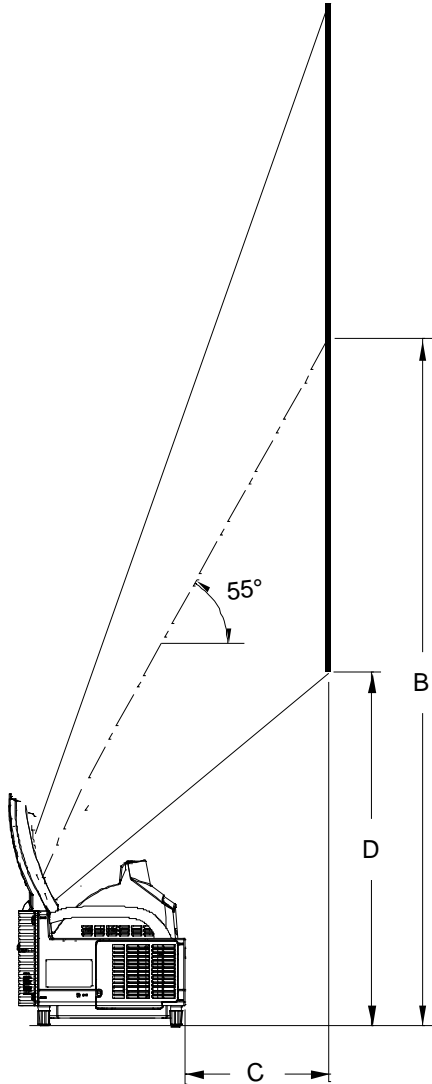

Distance chart for popular 4:3 screen sizes

Image Size (4:3)			B	C	D(4:3)
Diagonal	Width(W)	Height(H)			
inches	inches	inches	inches	inches	inches
40	32	24	26.0	2.5	14.0
48	38.4	28.8	30.4	5.7	16.0
60	48	36	37.0	10.3	19.0
64	51.2	38.4	39.2	11.9	20.0
67	53.6	40.2	40.8	13.1	20.7
72	57.6	43.2	43.6	15.0	22.0
77	61.6	46.2	46.3	17.0	23.2
84	67.2	50.4	50.2	19.7	25.0
90	72	54	53.5	22.0	26.5
94	75.2	56.4	55.7	23.6	27.5
100	80	60	59.0	25.9	29.0

Distance chart for popular 16:9 screen sizes

Image Size (16:9)			B	C	D(16:9)
Diagonal	Width(W)	Height(H)			
inches	inches	inches	inches	inches	inches
37	32	18	26.0	2.5	17.0
40	35	19.7	28.0	4.0	18.2
83	72	40.5	53.5	22.0	33.2
92	80	45	59.0	25.9	36.5

Vertical Position for a 16:9 screen: The Vertical Position adjustment moves the 16:9 image up and down in the unused portion of the 4:3 DLP panel. This adjustment is only available when the projector is set for 16:9 in the "Screen" menu. The range of Vertical Position is dependent on aspect ratio and 3D Reform used. If 3D Reform is not used, the approximate range of vertical position is +/-0.167H (H=Screen Height) when using a 16:9 screen. (See "Screen Type" and "Position" in user manual)





Note: For screen sizes not indicated in the distance charts, use the formulas on page 1.

WT610E Installation Guide

Desktop and Ceiling Mount

Cabinet Dimensions

The following drawings show the cabinet dimensions for the WT610. Dimensions are in inches. For millimeters multiply by 25.4.

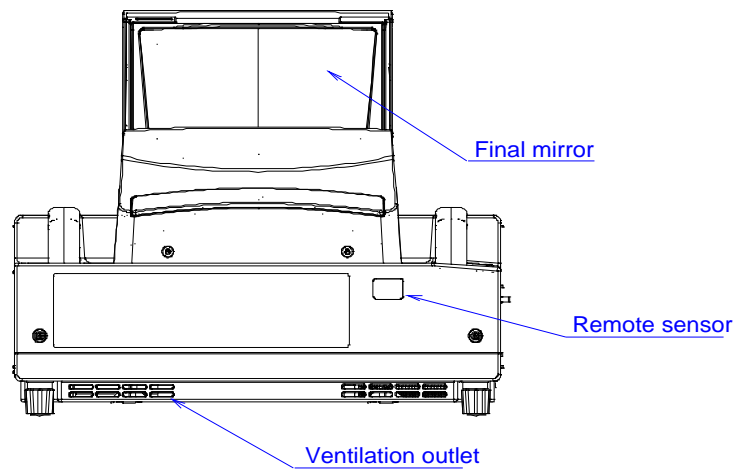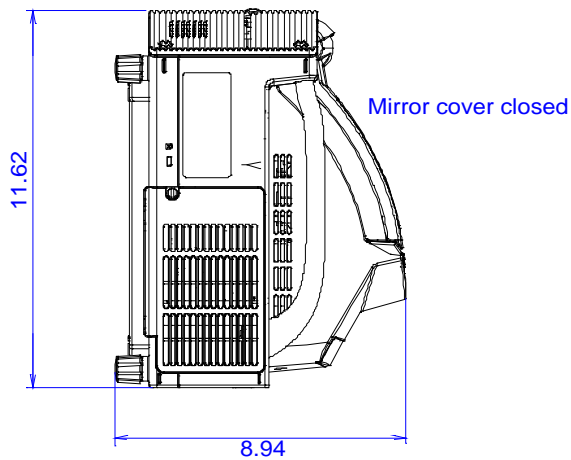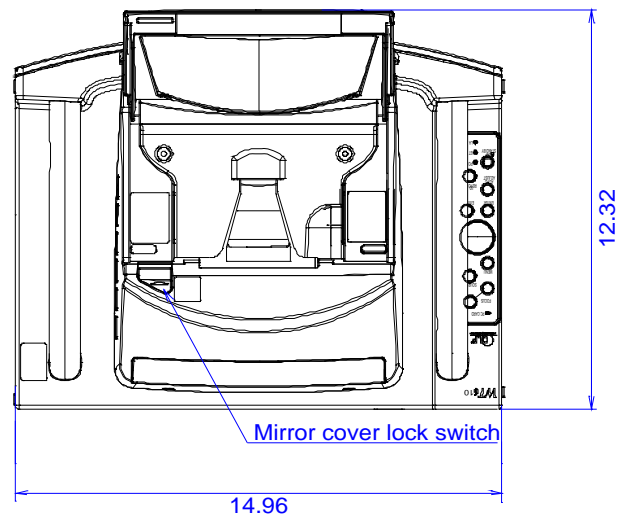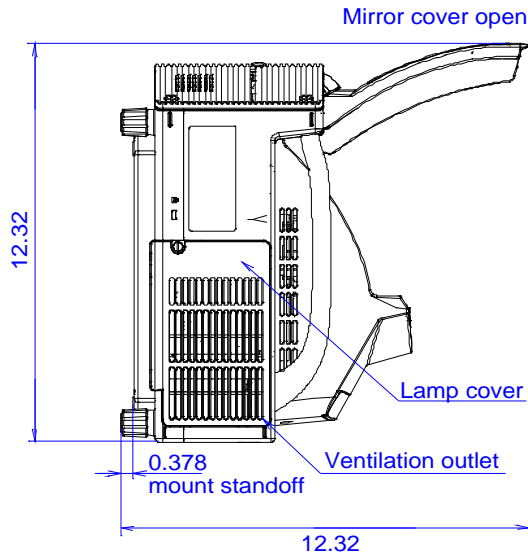



WT610E Installation Guide

Desktop and Ceiling Mount

v2.4

Cabinet Dimensions (continued)

The following drawings show the cabinet dimensions for the WT610. Dimensions are in inches. For millimeters multiply by 25.4.

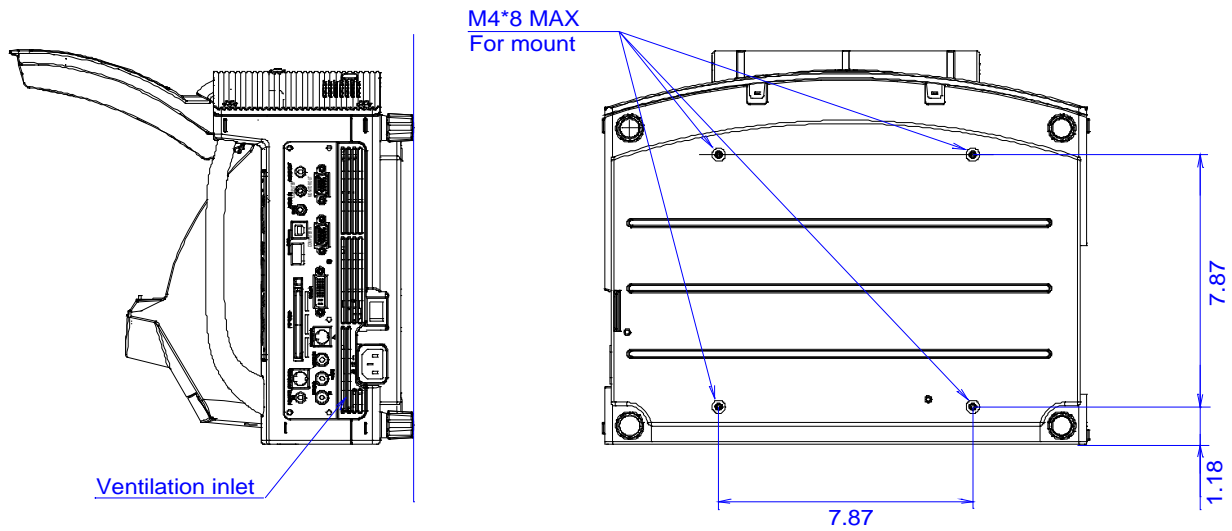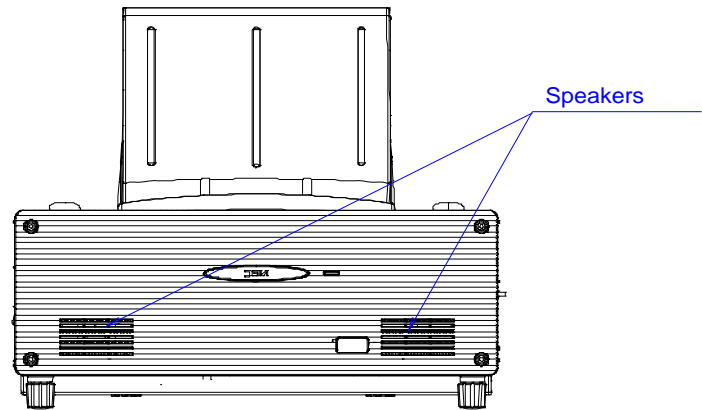






WT610E Installation Guide

Desktop and Ceiling Mount

v2.4

Optional Ceiling Mount Dimensions (Model #: WT60CM)

The following drawings show the ceiling mount dimensions for the WT610. Dimensions are in inches. For millimeters multiply by 25.4.

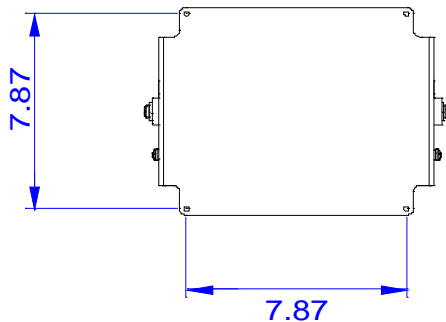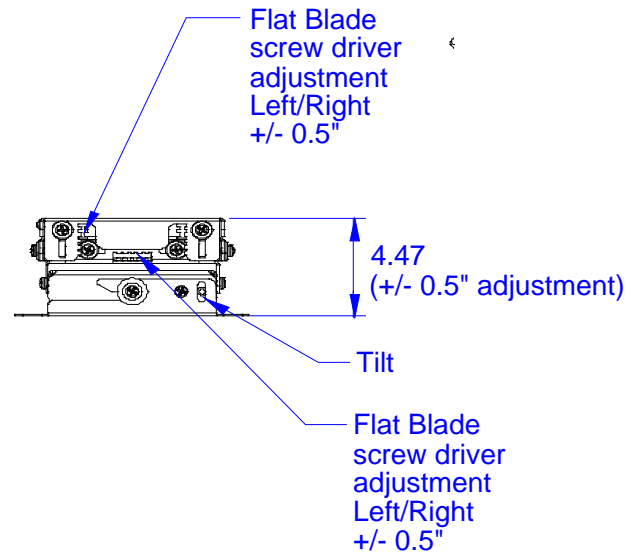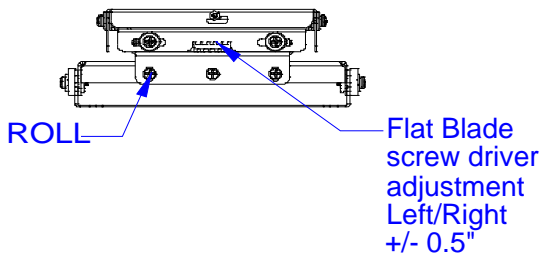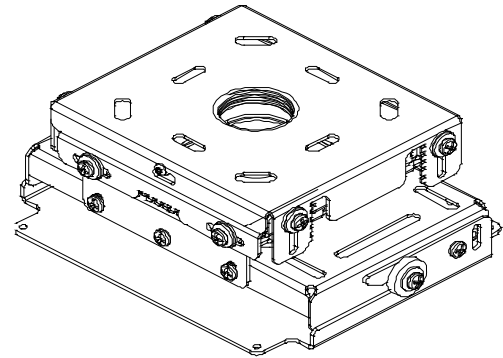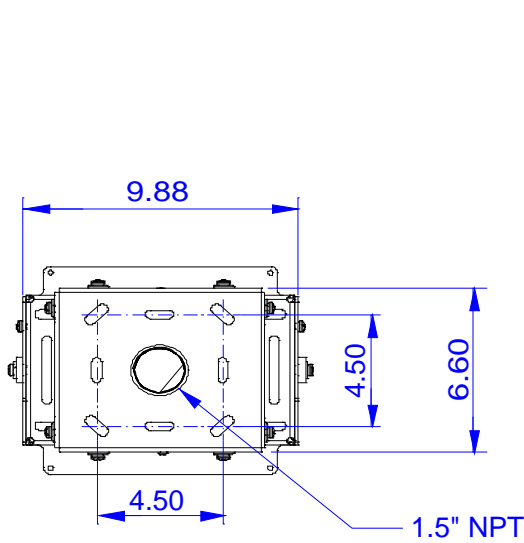


WT610E Installation Guide

Desktop and Ceiling Mount

v2.4

Optional Wall Mount Dimensions (Model #: WT60WM)

Note: The WT60WM wall mount can accommodate screen sizes of 52.7" – 83" diagonally based on the minimum and maximum throw distances shown below.

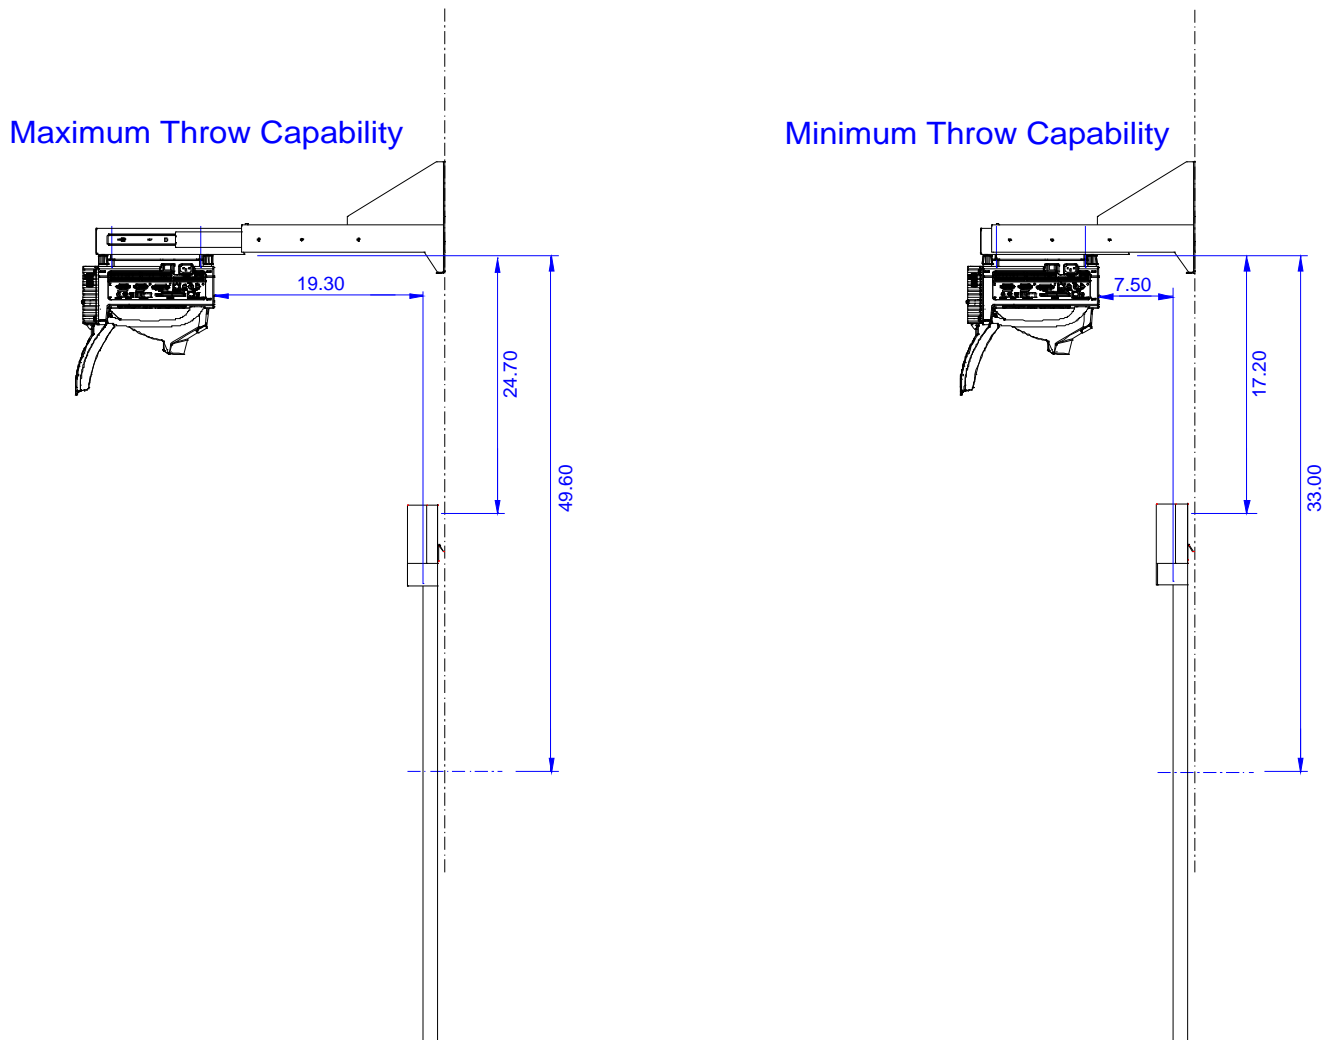


Note: The drawings above refer to the throw capability (throw distance "C") and their respective dimensions "B" and "D". The screen positions are not drawn to scale.

WT610E Installation Guide

Desktop and Ceiling Mount

v2.4

Input Panel

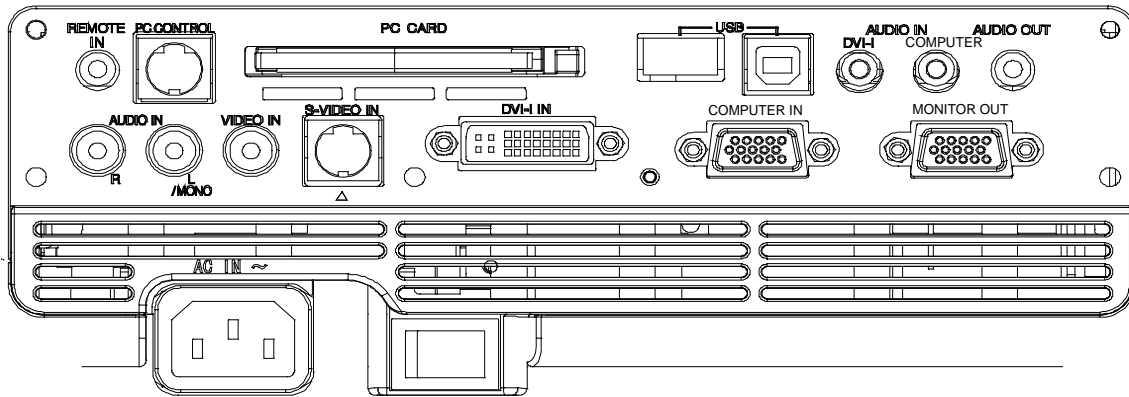

Control Codes

Function	Code Data
POWER ON	02H 00H 00H 00H 00H 02H
POWER OFF	02H 01H 00H 00H 00H 03H
INPUT SELECT RGB	02H 03H 00H 00H 02H 01H 01H 09H
INPUT SELECT DVI (ANALOG)	02H 03H 00H 00H 02H 01H 02H 0AH
INPUT SELECT DVI (DIGITAL)	02H 03H 00H 00H 02H 01H 1AH 22H
INPUT SELECT VIDEO	02H 03H 00H 00H 02H 01H 06H 0EH
INPUT SELECT S-VIDEO	02H 03H 00H 00H 02H 01H 0BH 13H
INPUT SELECT VIEWER	02H 03H 00H 00H 02H 01H 1FH 27H
PICTURE MUTE ON	02H 10H 00H 00H 00H 12H
PICTURE MUTE OFF	02H 11H 00H 00H 00H 13H
SOUND MUTE ON	02H 12H 00H 00H 00H 14H
SOUND MUTE OFF	02H 13H 00H 00H 00H 15H
ON SCREEN MUTE ON	02H 14H 00H 00H 00H 16H
ON SCREEN MUTE OFF	02H 15H 00H 00H 00H 17H


Note: Contact your NEC rep for codes not listed.

Cable Connection

Communication Protocol:

Baud Rate: 38400 bps
 Data Length: 8 bits
 Parity: No Parity
 Stop Bit: One bit
 X on/off: None
 Communications: Full duplex

PC Control Connector (DIN-8P)



NOTE 1: It is recommended to set the projector to "Idle Mode" in the Setup menu for best Power ON response.

NOTE 2: Pins 2, 3, 5, 6 and 8 are used inside the projector.

NOTE 3: For long cable runs it is recommended to set communication speed in the Setup menu to 9600 bps.