


# User Manual

SP-RM3

Rear mounted speaker passive

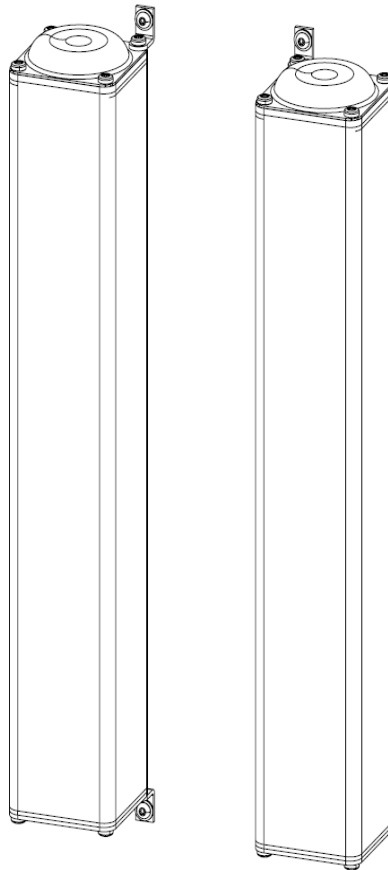

**Index**


---

|                               |         |
|-------------------------------|---------|
| Index .....                   | Page 02 |
| Shipping content .....        | Page 03 |
| Assembly process .....        | Page 04 |
| Assembly instruction .....    | Page 05 |
| Technical specification ..... | Page 06 |
| Outlines .....                | Page 07 |


### Shipping Content

#### SP-RM3


1. 2x SP-RM3 Speaker
2. 4x M4 Screw
3. 4x M4 Washer
4. 4x Mounting bracket (pre-mounted to the speaker)
5. 4x additional mounting brackets (alternative mounting meeting ADA Guidelines in US Market)
6. 2x Speaker cable (2m) (not shown here)

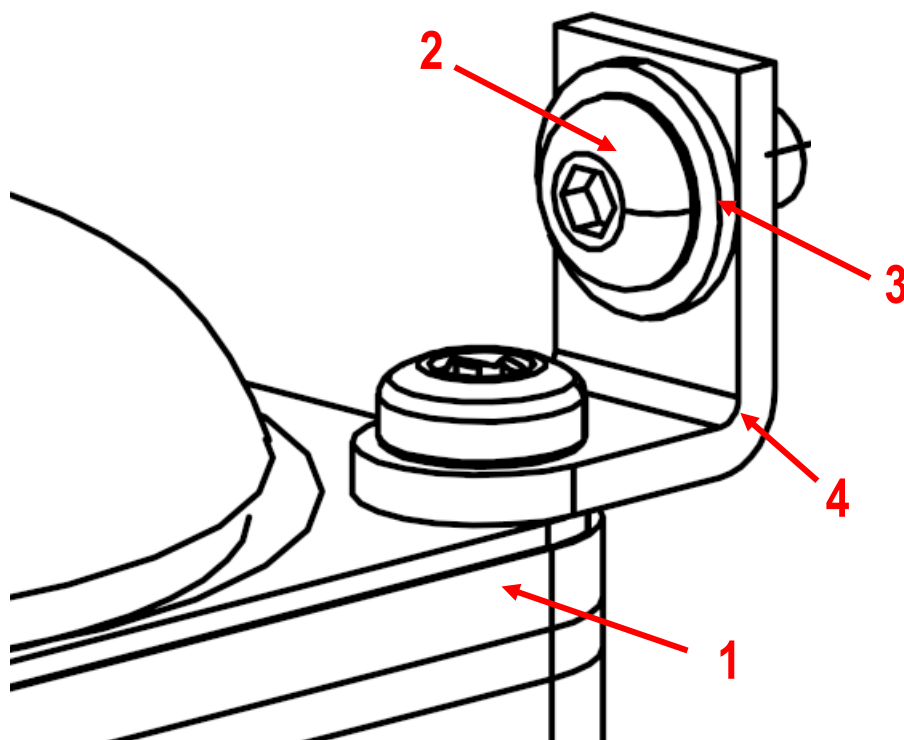

#### Alternative mounting of SP-RM3 by using additional brackets for US Market (6)

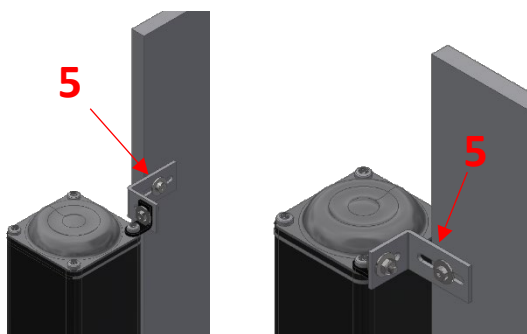

Alternative mounting option 1

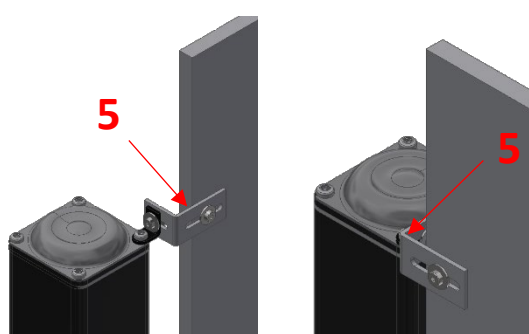


Alternative mounting option 2

## Assembly process

- 1) Turn OFF the main power switch on the monitor.
- 2) Using two M4 screws, two washers, and the mounting brackets, attach the left speaker.
- 3) Repeat step 2 for the right speaker.
- 4) If needed, remove the handles from the monitor to be able to move the speakers behind the monitor.
- 5) Connect one end of the speaker cable to the bottom of the speaker (one cable per speaker). Connect the other end of each speaker cable to the external speaker terminal on the monitor. Make sure the polarity is correct.
- 6) Set the monitor's terminal speaker switch to EXTERNAL.


Red number below indicates the process step

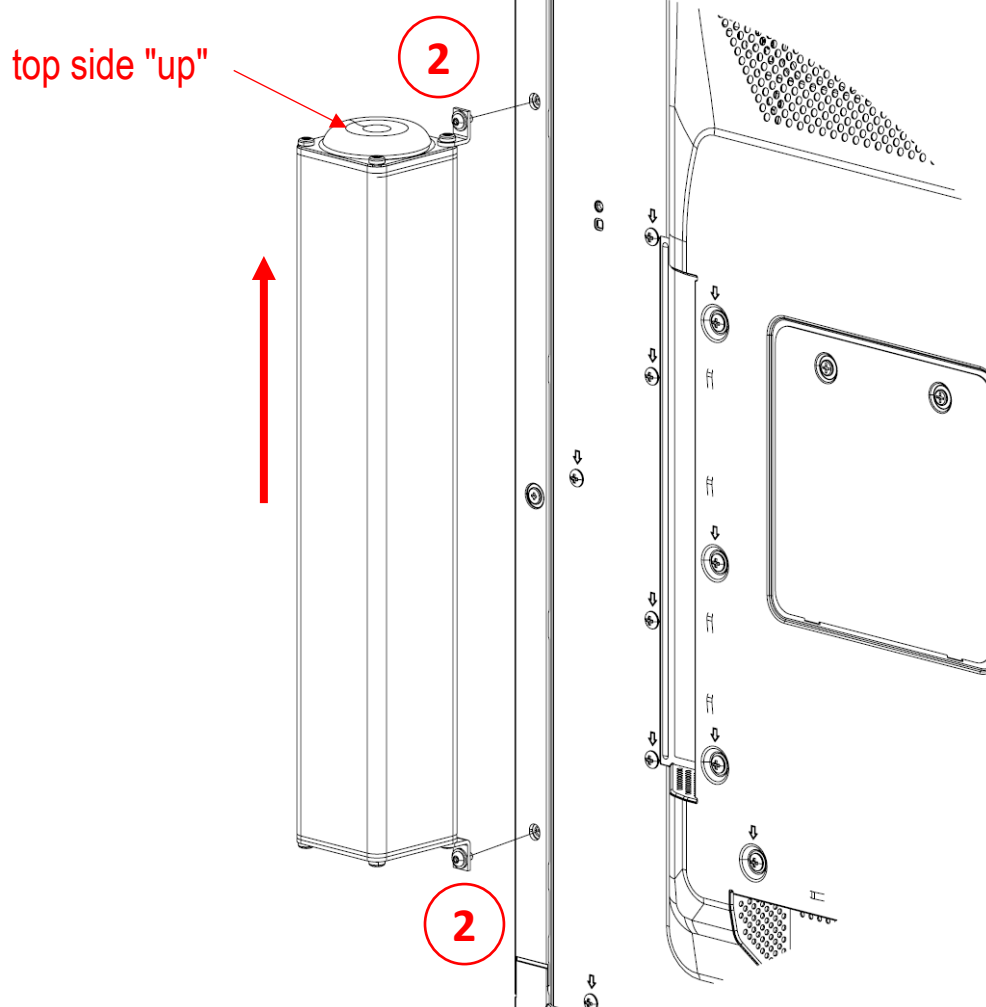

### Important NOTE :

The shown mounting position is holding the speaker visible from the front side of the display. This mounting position is recommended for best sound quality results. However, to achieve a hidden installation, the speaker can be flipped to the backside of the display (depending on the selected display model)

Not all displays, especially smaller sizes <42", may allow a fully hidden installation of the speaker.

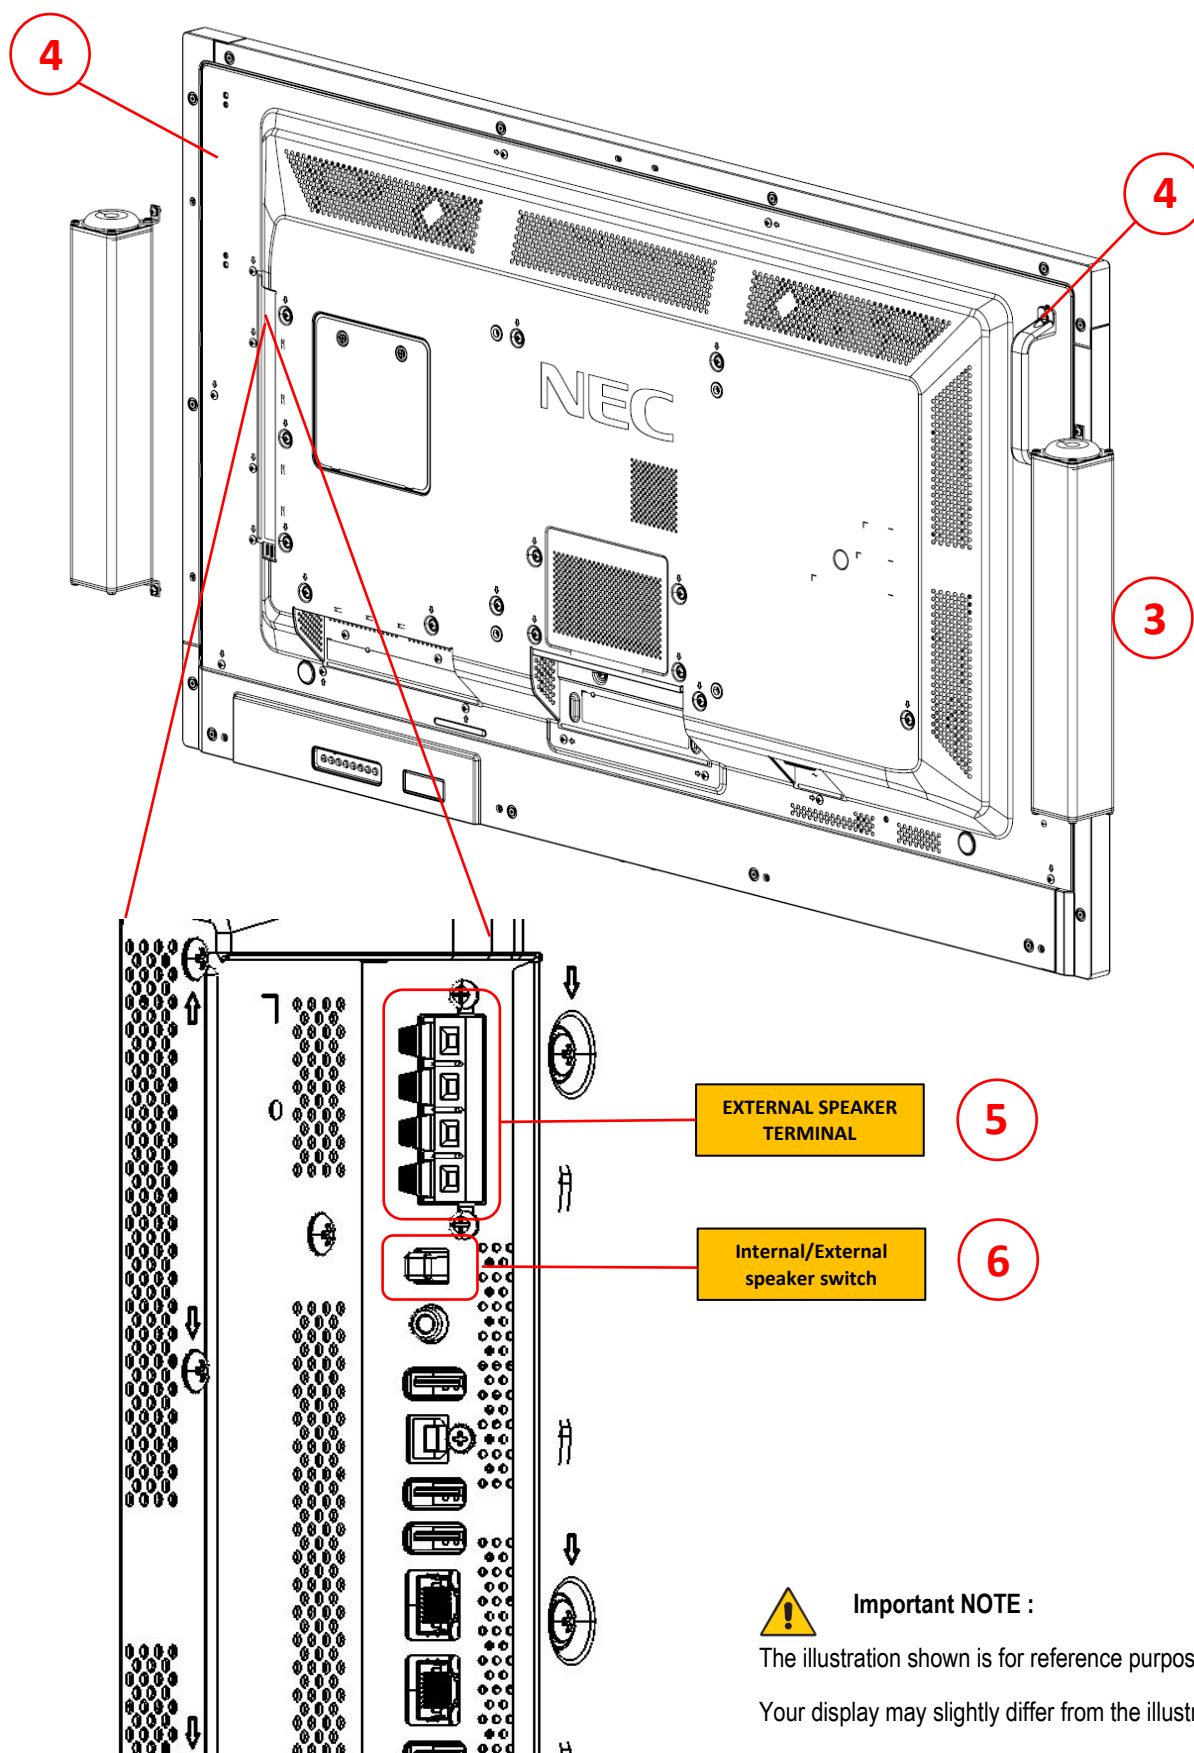

### Important NOTE :


The illustration shown is for reference purpose only.

Your display may slightly differ from the illustration.

Actual connections depend on the display model used.

### Specification / Outlines

|                         |                |
|-------------------------|----------------|
| Frequency range         | 80-20000 Hz    |
| Sensitivity             | 72 dB          |
| Rated Impedance         | 8 Ohm          |
| Long term max. power    | 20 W           |
| Net. Dimensions (1pcs)  | 370x60x60 mm   |
| Net. Weight (1pcs)      | 1 kg           |
| Packing gross dimension | 420x220x130 mm |
| Packing gross weight    | 2,4 kg         |

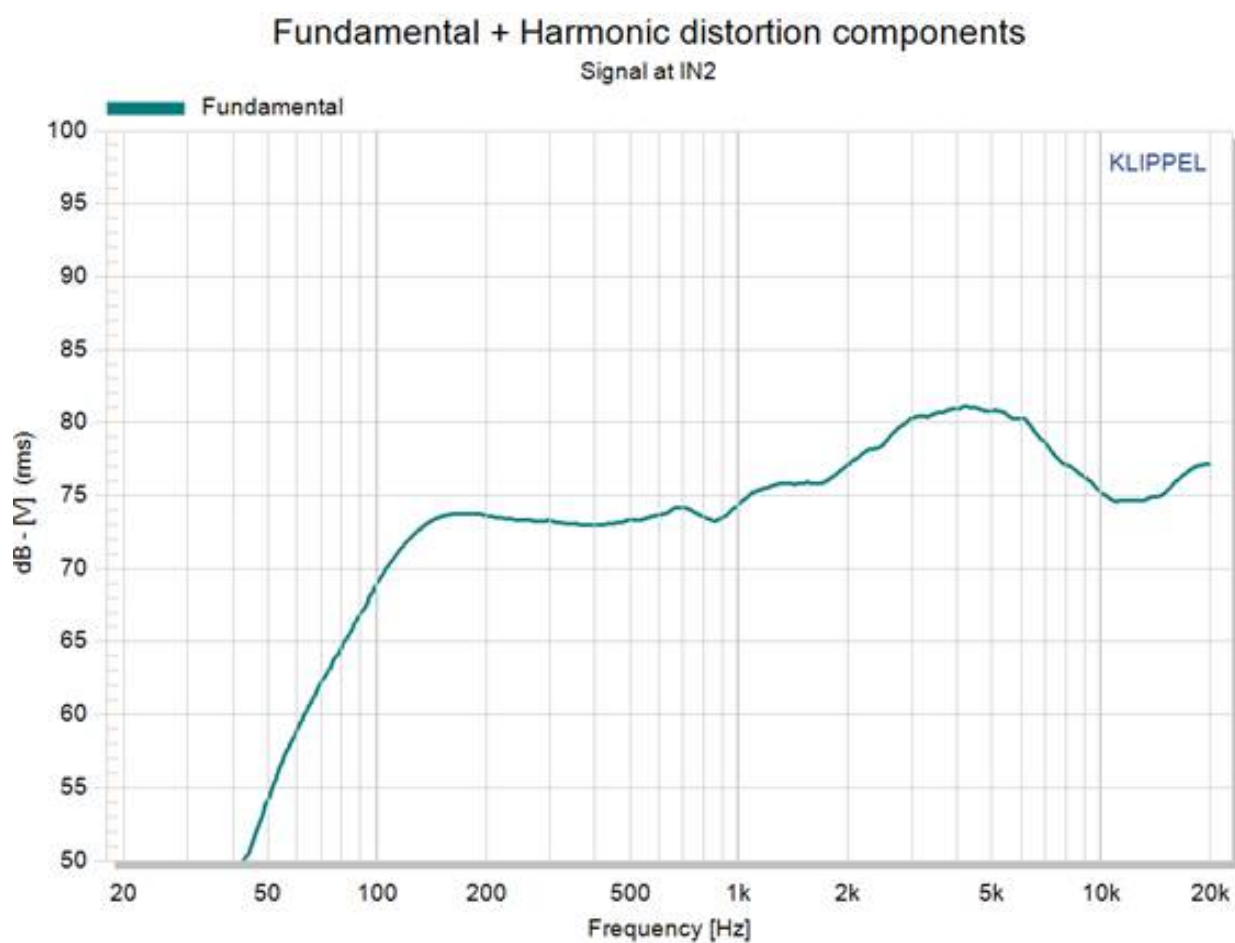

## Specification / Outlines

