

Orchestrating a brighter world

NEC

# E705-DNT 70" 12pt Touch Collaborative Solution



# A 70" commercial grade display combined with integrated touch, and robust collaborative whiteboard software

- Screen Mirroring
- Real-Time Collaboration
- Wireless Presenting & Presentation Capture
- Digital Whiteboard
- All In One Solution



DisplayNote transforms presentations for presenters and participants. Use it to present wirelessly with an iPad or Android and mirror your screen to every participant's device. Attendees can view and capture your slides on their device and collaborate with each other in real-time.

## Screen Mirroring

Stream from your PC or Mac to multiple mobile devices either wirelessly in a room or remotely via the cloud. Now there's no need to republish or reformat existing materials for use with mobile devices.

## Real-Time Collaboration

Let your audience collaborate in real-time, contribute to your presentation and share ideas across departments, locations and devices.

## Wireless Presenting

Use a mobile device as a handheld whiteboard, to control your PC or Mac, present wirelessly, share annotations to connected devices and pose response-style questions to any audience member.

## Presentation Capture

Anyone in your meeting can capture your presentation on their device and add personalised notes without the need for a separate note-taking app.

## Interactive Whiteboard

Increase student participation or work productivity using the included Interactive Whiteboard software to create lessons, annotate on presentations, and allow for back and forth collaboration between the teacher/presenter and the participants.

## Lesson Capture

Anyone in your lesson or lecture can capture your content on their device and add personalised notes without the need for a separate note-taking app.



The E705-DNT includes one DisplayNote license that would allow up to 19 participants to connect with the presenter for real time collaboration using mobile devices.

**TOUCH**SYSTEMS

# E705-DNT

## Touch Display

This 70" touch screen can operate 16/7 due to its internal and external design. Internally, the display features thermal and cooling abilities as well as self-diagnosis tools and fan technology. Externally, the display claims a sealed, industrial-strength, premium-grade panel design, so you can mount the display in even the most heavily trafficked areas.

**At a Glance**

- 16/7 operation

---

- LED Edge-lit

---

- 4000:1 contrast ratio

---

- Industrial strength design

---

- Landscape Orientation

**Applications**

- QSR

---

- Classrooms

---


- Public spaces

---

- Corporate huddle rooms

## Commercial-Grade

- LED backlighting delivers both environmental and economic benefits
- Temperature sensors and fans protect the panel from damage
- High definition, and contrast ratio deliver superior visual quality
- Internal 10W speakers and built-in handles enable a simplified installation

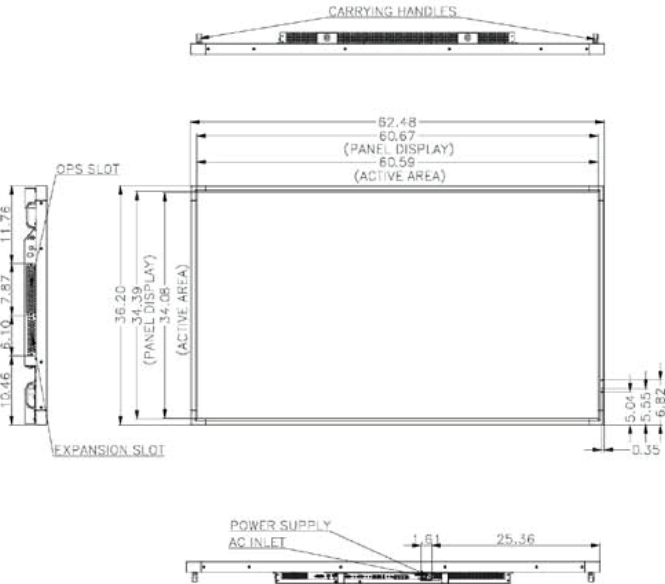


## Connected

- Comprehensive input panel connects to latest peripherals
- Full bi-directional RS-232 control and ethernet control allow individual and group-addressable control, including email diagnostics
- Compatibility with NEC control software PD Comms Tool and NaViSet Administrator 2
- Custom input detect feature to prioritize active inputs
- Expanded terminal interface including 2 HDMI, DisplayPort, DVI and VGA options



## Adaptable

- Flexible connectivity with built-in OPS expansion slot for maximum versatility
- Extensive control and diagnostic communication provide the highest level of remote management
- IR and Button Lock options for protecting against unnecessary setting changes

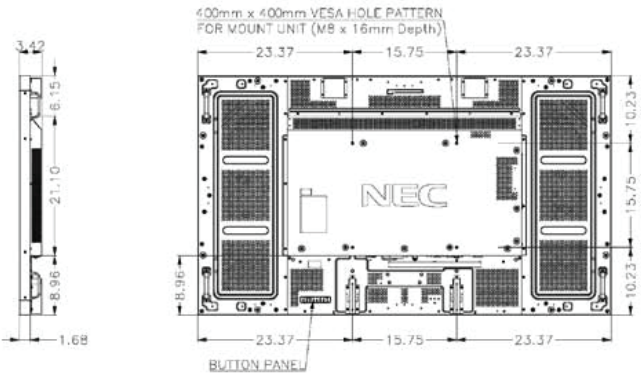

MODEL		E705-DNT	
<b>LCD Module</b>	Panel Technology	UV <sup>2</sup> A	
	Viewable Image Size	70"	
	Native Resolution	1920 x 1080	
	Brightness (typical/Max)	360/450cd/m <sup>2</sup>	
	Contrast Ratio (typical)	4000:1	
	Viewing Angle	176° Vert., 176° Hor. (88U/88D/88L/88R) @ CR>10	
	Aspect Ratio	16:9	
	Active Screen Area	60.6 x 34.1in. / 1538.9 x 865.6mm	
	Displayable Colors	More than 16.7 million	
<b>CONNECTIVITY</b>	Input Terminals	Digital	DisplayPort, HDMI (2), DVI
		Analog	VGA 15-pin D-sub
		Audio	Audio Mini-Jack x 2
		External Control	Ethernet (RJ45), RS-232C
	Output Terminals	Audio	Audio Mini-Jack, External Speaker Jack (2)
<b>POWER CONSUMPTION</b>	On (typical)	150W	
	Power Savings Mode	<2.5W	
<b>PHYSICAL SPECIFICATIONS</b>	Net Dimensions	62.48 x 36.2 x 3.96 in (1587.0 x 919.5 x 100.59 mm)	
	Net Weight	136.1 lbs (61.75 Kg)	
<b>ENVIRONMENTAL CONDITIONS</b>	Operating Temperature	41-104°F / 5-40°C	
	Operating Humidity	20-80%	
	Operating Altitude	9843 ft. / 3000m	
<b>OPTIONAL ACCESSORIES</b>	Single Board Computers	All NEC OPS-based computers	
	Other	SB-03TM (Digital Tuner included in -AVT models), ST-801 (stand), SP-TF1 (thin rear or side-mounted speakers, 15W x 2), SB-01HC (OPS HD-SDI Card), SB-04HC (OPS 3G-SDI Card), ARM based Digital Media Player (OPS-DRD), Large Wall Mount (WMK-6598 ),OPS HDBaseT Receiver (SB-07BC)	
<b>VESA HOLE CONFIGURATION</b>	400 x 400mm		
<b>TOUCH PANEL</b>	12 point IR touch with protective glass. Compatible with PC and Macintosh		
<b>DISPLAY NOTE</b>	License includes 1 presenter and up to 19 users. Compatible with PC, Macintosh, and mobile devices		
<b>LIMITED WARRANTY</b>	3 years Parts and Labor, including Backlight		
<b>ADDITIONAL FEATURES</b>	Integrated temperature sensors, thermodynamic cooling fans, Ethernet Control and Communication, RS-232C Control and Communication, AMX Beacon Compatible, Crestron Connected Compatible, Carbon Footprint Meter, Full 24/7 Scheduler Function, PIP/POP/Side by Side settings, Input Labeling, Built-In Speakers, OPS-Compliant Slot, Custom Input Detect Modes, NaViSet Administrator 2 Compatible, NEC PD Comms Tool Compatible, IR Lock Settings, Button Lock , Fixed/Variable Audio Out		
<b>SHIPS WITH</b>	Power Cord, 1.8m DVI-D Cable, Wireless Remote Control, Batteries, CD-ROM, Setup Manual		

TileMatrix and TileComp are trademarks of NEC Display Solutions.  
 All other brand or product names are trademarks or registered trademarks of their respective holders.  
 Product specifications subject to change.