

LED-FE009i2-104

104" Indoor LED 0.95mm 21:9 UW-FHD Bundle



Nothing less than magnificent

The ultra-wide format provides more screen space over a stretched single canvas to create an immersive experience.

The modular design of dvLEDs make it perfect for creating a 21:9 aspect ratio used in modern panoramic video conferencing layouts or multiple window usage. This 104" 21:9 kit is built with NEC's 0.95mm LED-FE009i2 modules and is ideal for viewing from 3 to 6 feet away. The ultra-wide 21:9 format is perfect for the latest video conferencing setups and is ideal for corporate and education customers.

Benefits

21:9 Aspect Ratio – allowing for seamless integration of the latest video conferencing setups.


Quality product – designed and tested in Germany, LED fine pitch product of the highest quality.

Slim design – with a flush rear profile, LED modules allow for greater installation flexibility and meet ADA requirements.

Front serviceable modules – with hot-swappable pixel cards allow for quick and easy maintenance when needed


Excellent Homogeneity – uniform color and brightness across the entire wall.

Outstanding Picture Quality – through the use of Multi-Color LEDs.

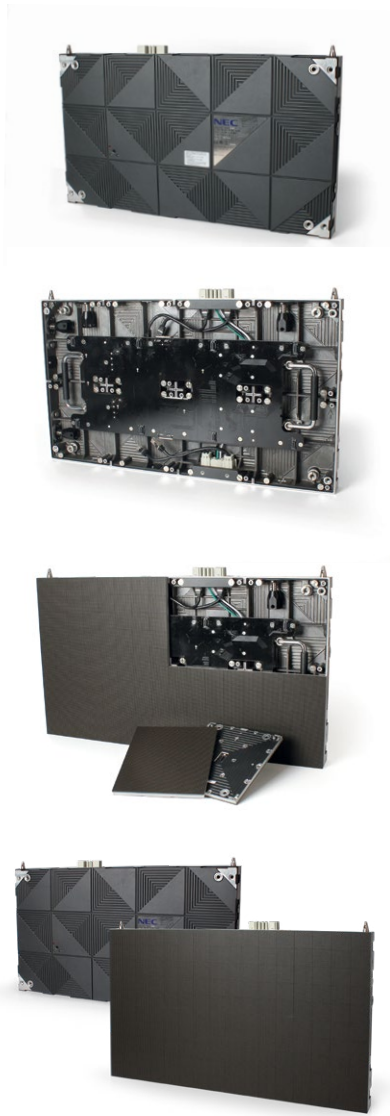


Direct View LED Module		LED-FE009i2
DISPLAY	Panel Technology	Direct View LED
	Pixel Configuration	4 in 1 IMD (Black)
	Panel Resolution	2560 x 1080
	Aspect Ratio	21:9
	Pixel Pitch	0.95mm
	Brightness (typical)	600cd/m ²
	Contrast Ratio (typical)	5000:1
	Viewing Angle (typical)	70/70 horizontal / 70/70 vertical
	Dimming Capability	256 levels
	Color Processing	Up to 16 bit
	Displayable Colors	281 Trillion
Refresh Rate	Up to 3840 Hz	
Lifetime	100,000 Hours	
CONNECTIVITY	Input Terminals Digital	1 x 3G SDI; 1 x DVI-D; 1 x HDMI
	External Control	1 x GenLock; 1 x LAN
POWER CONSUMPTION	On (typical)	960 Watts
	Max	1800 Watts
PHYSICAL SPECIFICATIONS	Dimensions (W x H x D)	97.3 x 42 x 3.2in / 2472 x 1066 x 82mm
	Weight (Net)	254.9lbs / 115.6kg
ENVIRONMENTAL CONDITIONS	Operating Temperature	-4° to 104°F / -20° to 40°C
	Operating Humidity	10% to 80%
	Storage Temperature	-4° to 113°F / -20° to 45°C
	Storage Humidity	10% to 85%
	IP Rating	IP20
SHIPS WITH	1x LED Controller, LED Modules (12 Cabinets, 96 Pixel Cards), Overframe Kit (4x3), Pixel Card Removal Tool, Spare Parts Kit, Wall Mount 4x3	
LIMITED WARRANTY	3 years	

Every bundle ships with



LED Modules




Overframe



Pixel Card Removal Tool



Spare Parts



Wallmount



LED Controller

All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.