


42VP4/42VP4D/42XM2 Installation Guide

42" Plasma Displays

v3.7

Contents

Product Description and Notes	Page 1
Ventilation Requirements	Page 2
Display Dimensions	
Front, Top & Bottom	Page 3
Rear	Page 4
Left & Right Side	Page 5
Display Dimensions w/Optional Speakers and Stand	Page 6
Dimensions w/Optional Flat Wall Mount	Page 7
Dimensions w/Optional Tilt Wall Mount	Page 8
Dimensions w/Optional Ceiling Mount	Page 9
Portrait Mode	Page 10
Connections	Page 11
Control Codes	Page 12

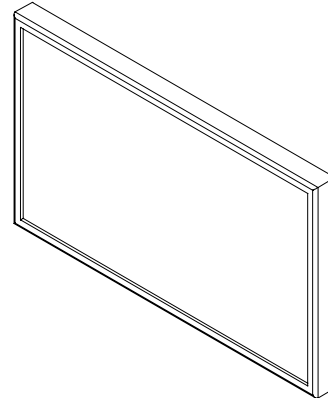

Product Description

Type:	Plasma Display	Screen Surface:	42VP4/42XM2: Anti-Reflective
Resolution:	42VP4/42VP4D: 853x480		42VP4D: Anti-Glare
	42XM2: 1024x768 (XGA)	Dimensions:	40"(W) x 24"(H) x 3.5"(D)
Aspect Ratio:	16:9	Weight:	42VP4/42VP4D: 62.8 lbs
Color Correction:	NEC CCF (Capsulated Color Filter, in panel) and AccuCrimson (in front filter)		42XM2: 65.0 lbs


Notes

- This document is intended to be used as a reference guide to supply useful information for a design or installation. It is not intended to be a step-by step procedure for installation.
- Any ceilings or walls must be strong enough to support the display and the installation must be in accordance with any local building codes. All mounts should make secure contact to wood studs.
- 4:3 sources can be displayed on the 16:9 screen in either normal aspect ratio with bars on the left or right, or stretched horizontally to fill the screen using the menus (see "Aspect Modes" in menus and user manual).
- Distances are in inches, for millimeters multiply by 25.4.
- Distances may vary $\pm 5\%$.

Maximum Tilt Angles


Below are the maximum angles that the display can be tilted in both landscape and portrait mode

Landscape	30°
Portrait	10°

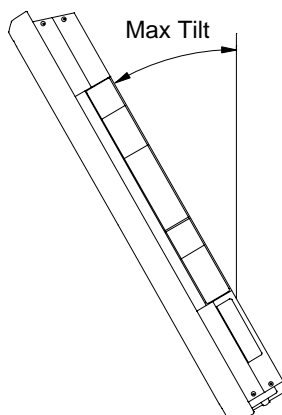

Ventilation Requirements (all models)


Dimensions below are minimum required for proper ventilation.

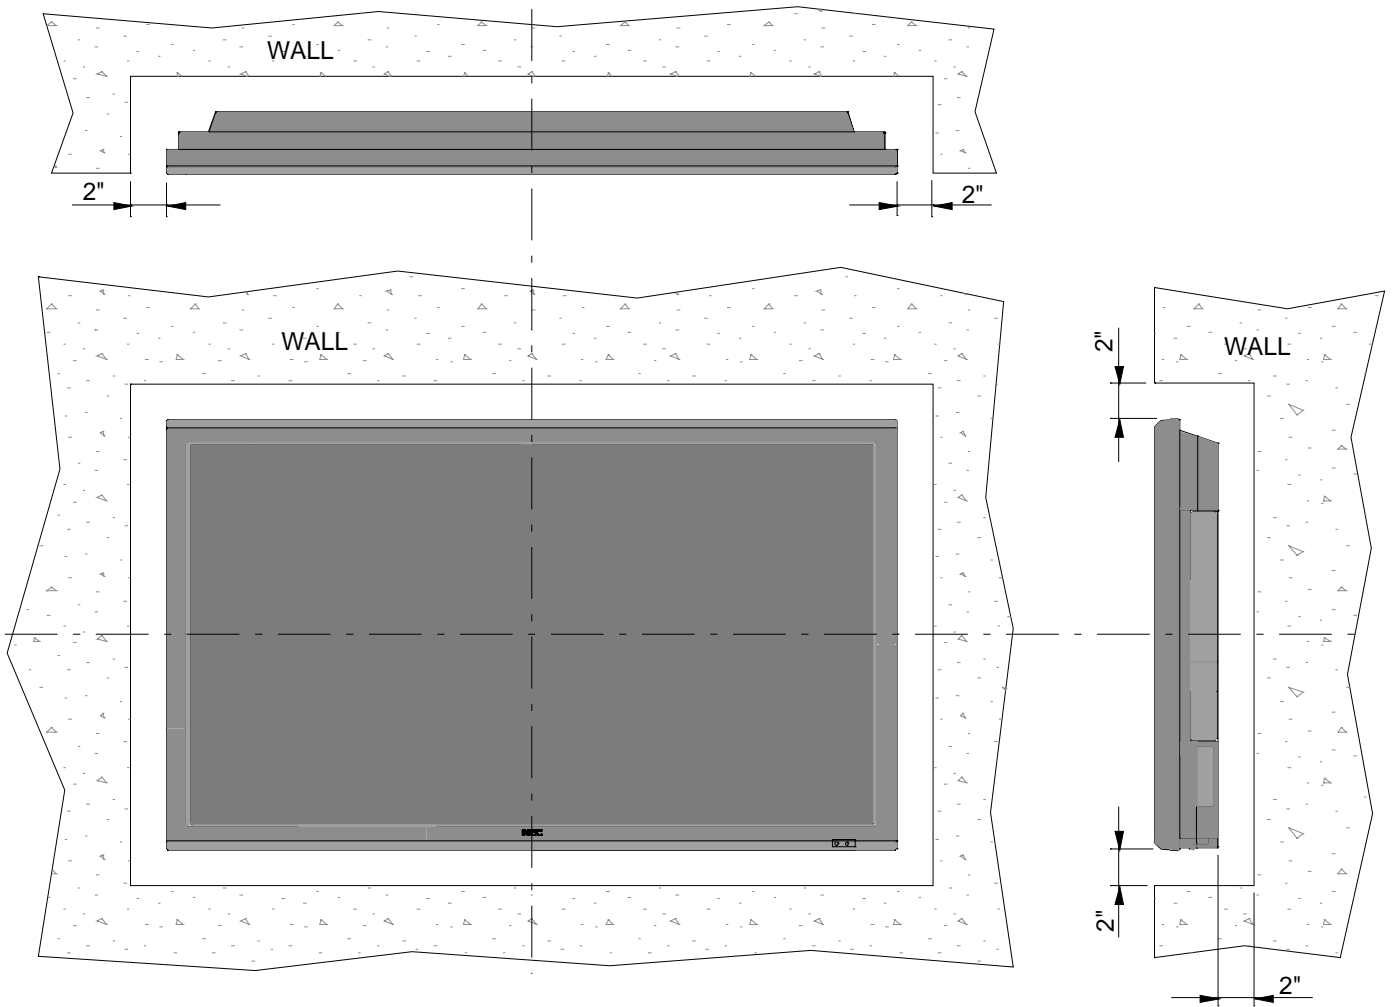


NOTE: The ventilation space should not be covered or closed off at the front of the opening. If for some reason the opening needs to be covered, other means of ventilation will need to be incorporated into the design. Contact NEC for design review and recommendations.

Display dimensions (cont.)


42VP4/42VP4D Rear View

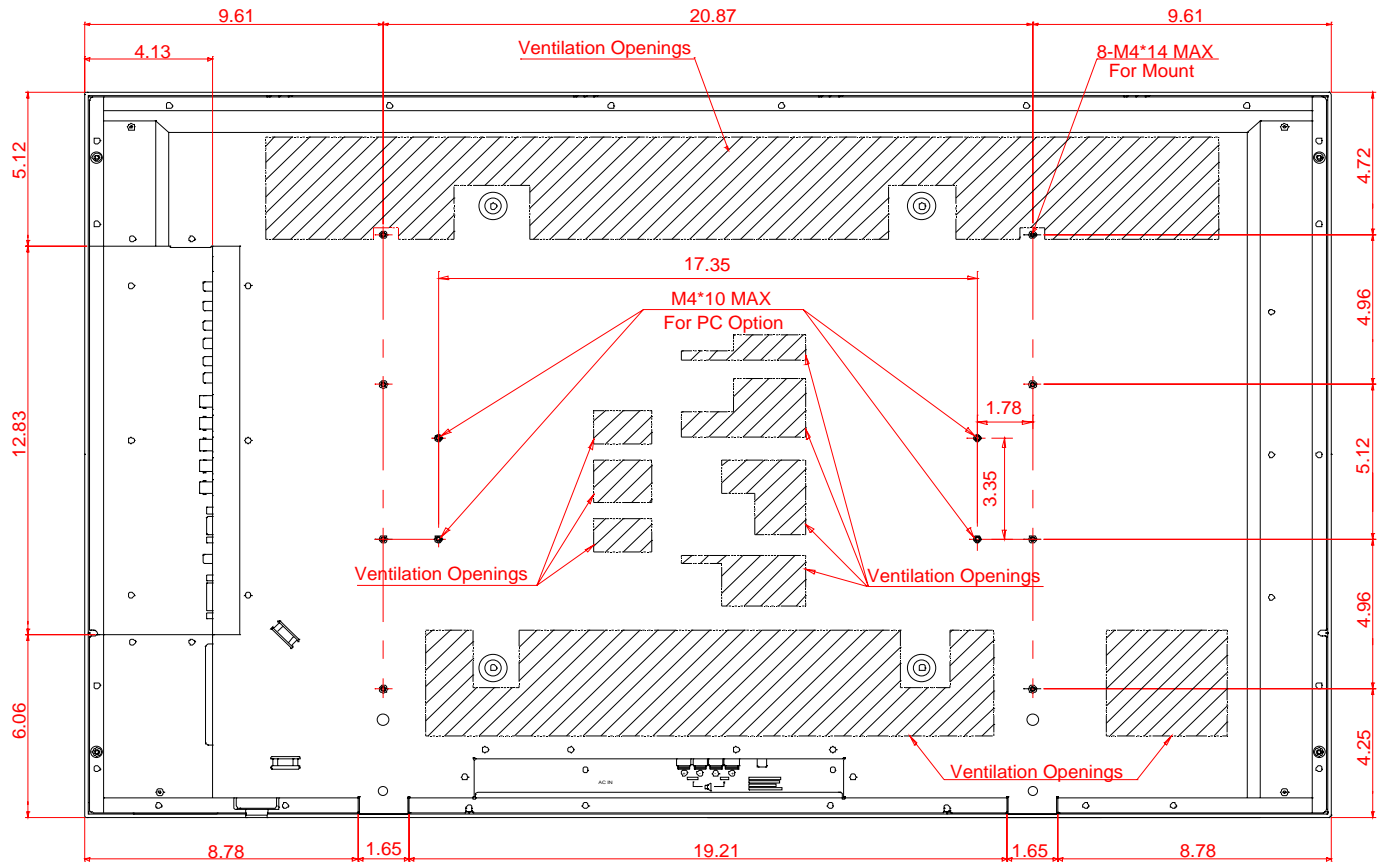


42XM2 Rear View (rear ventilation different)

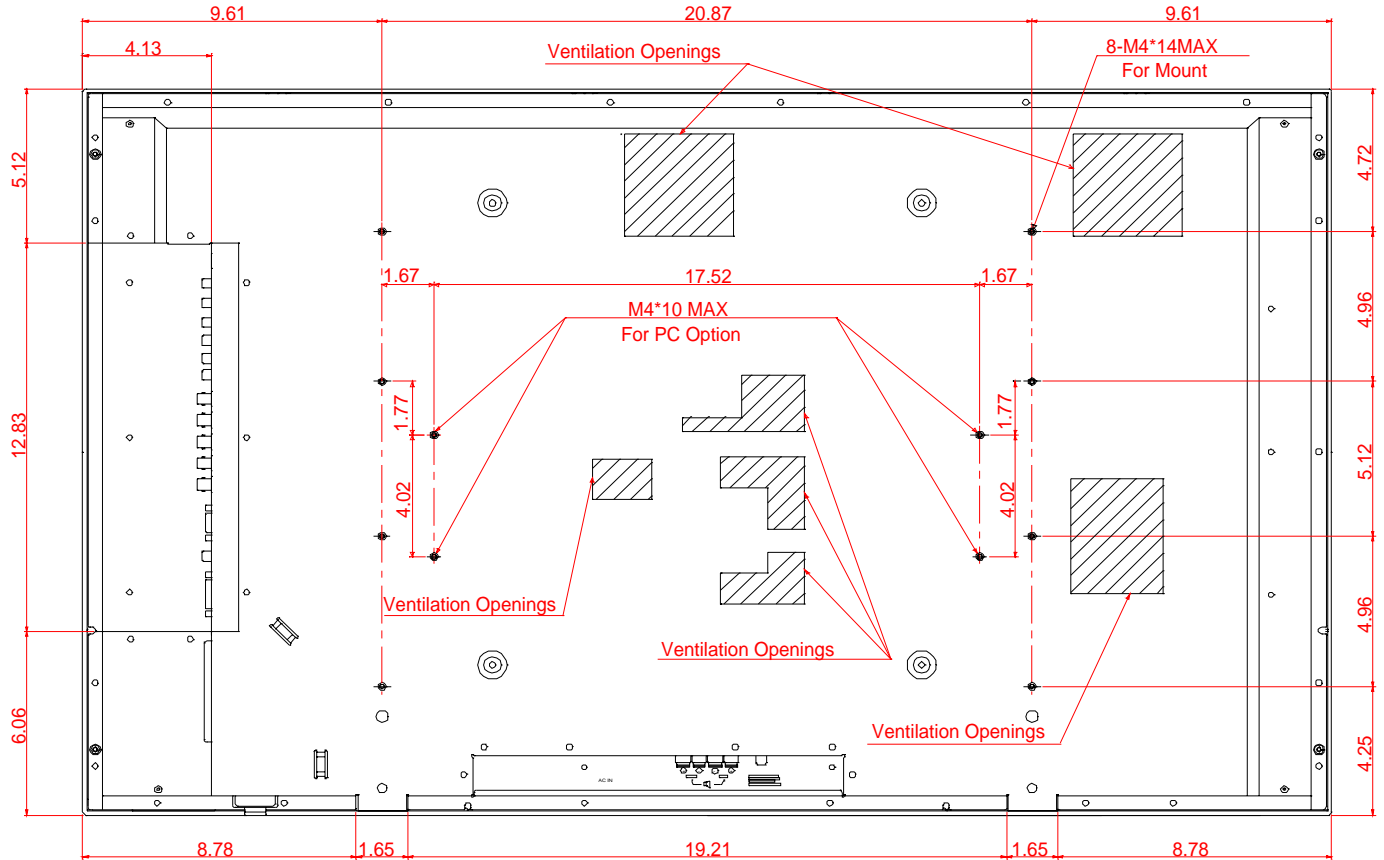

Dimensions with optional speakers and stand


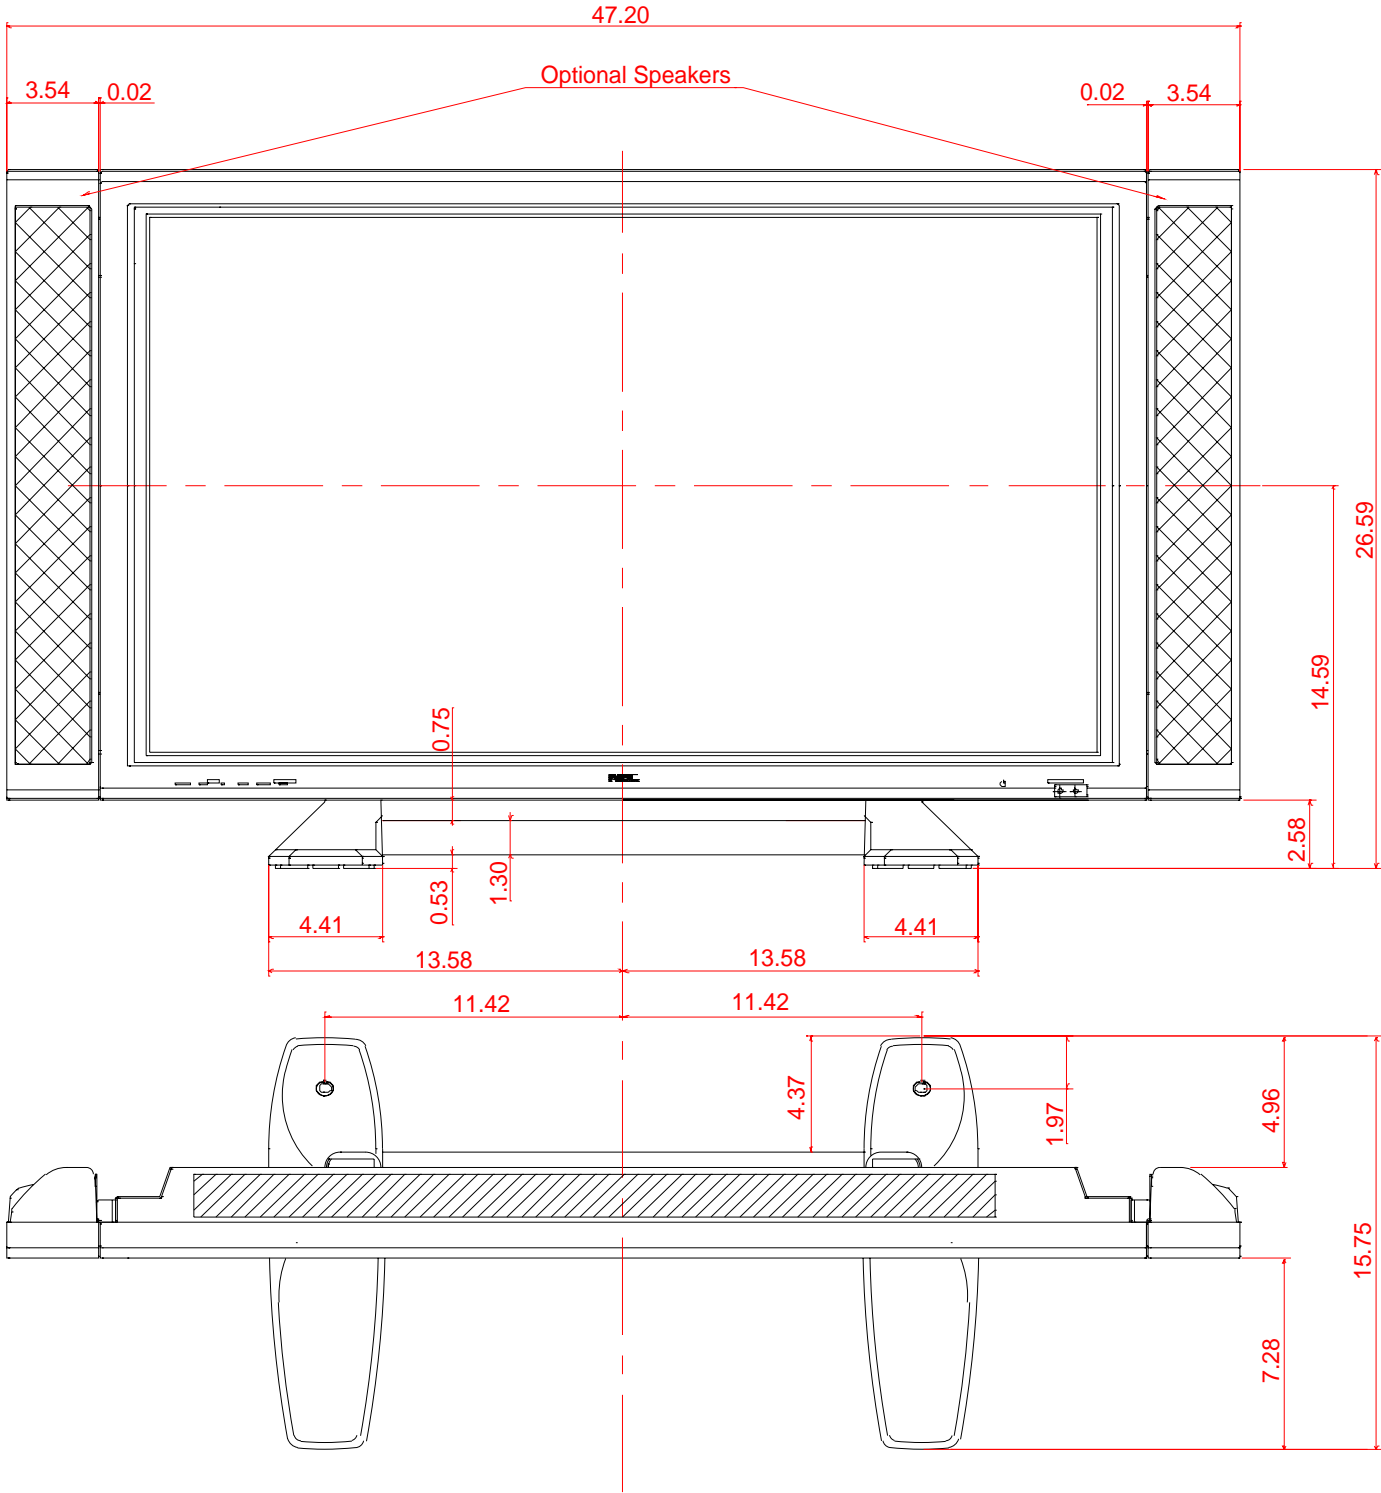


Dimensions with optional Flat Wall Mount Kit (FWMK)

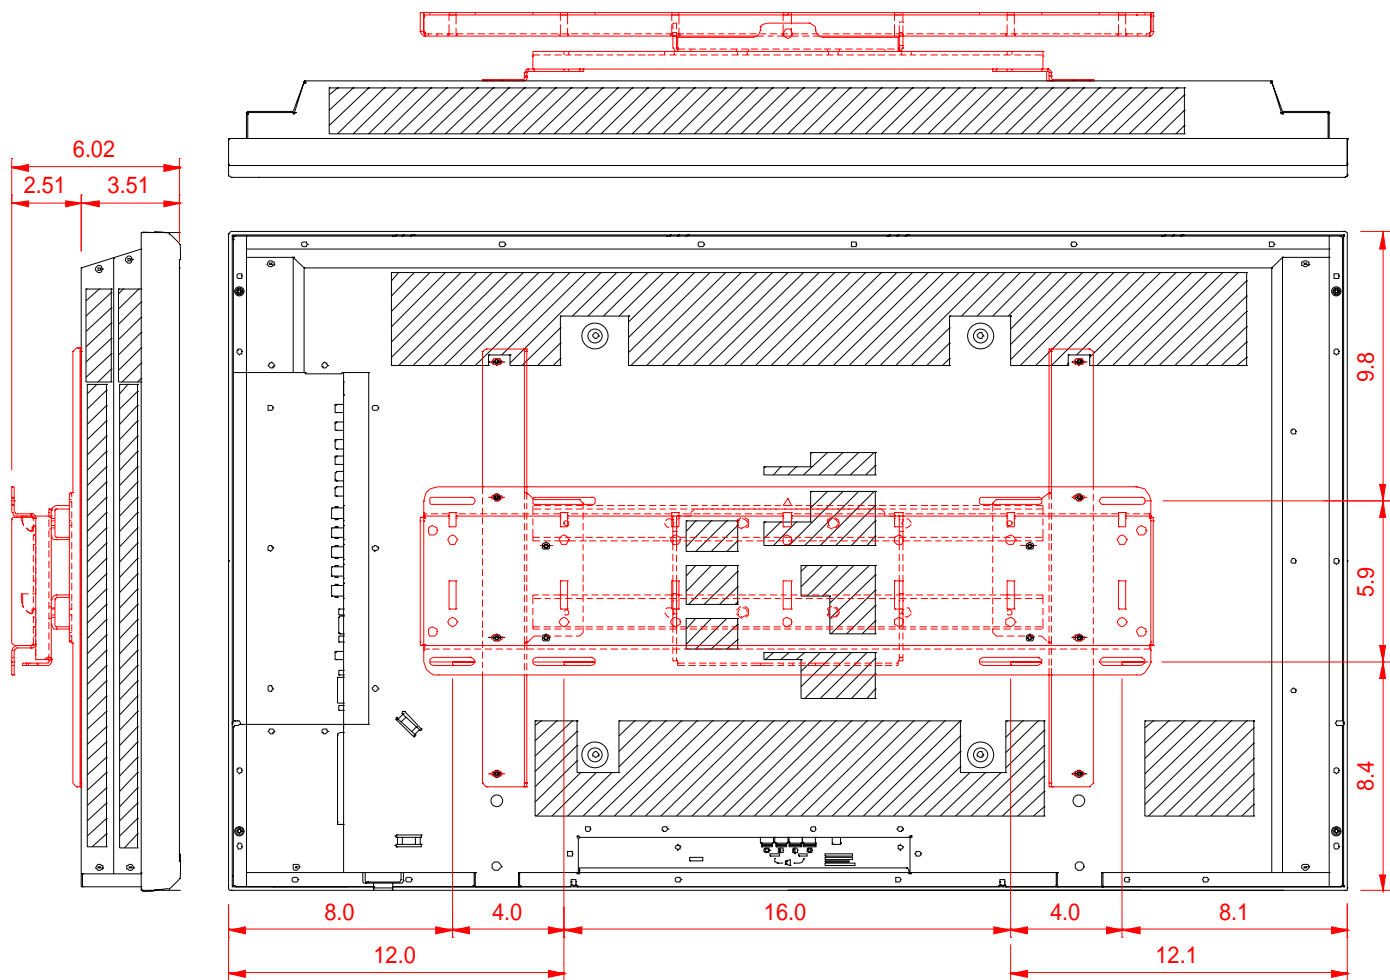


Note: The mount holes are higher on the 42VP4/42VP4D/42XM2 than on the prior units due to a higher center of gravity. (mount pattern is the same)
 42VP4/42VP4D/42XM2 mount holes are 0.24" higher than 42PD3(PX-42VP3)
 42VP4/42VP4D/42XM2 mount holes are 0.83" higher than 42MP3(PX-42V3)/42MP4(PX-42XM1)

Dimensions with optional Tilt Wall Mount Kit (TWMK)

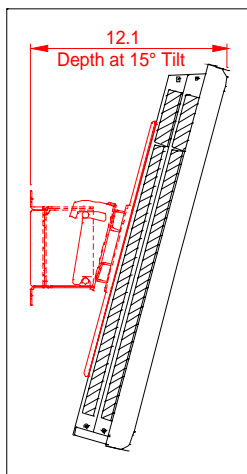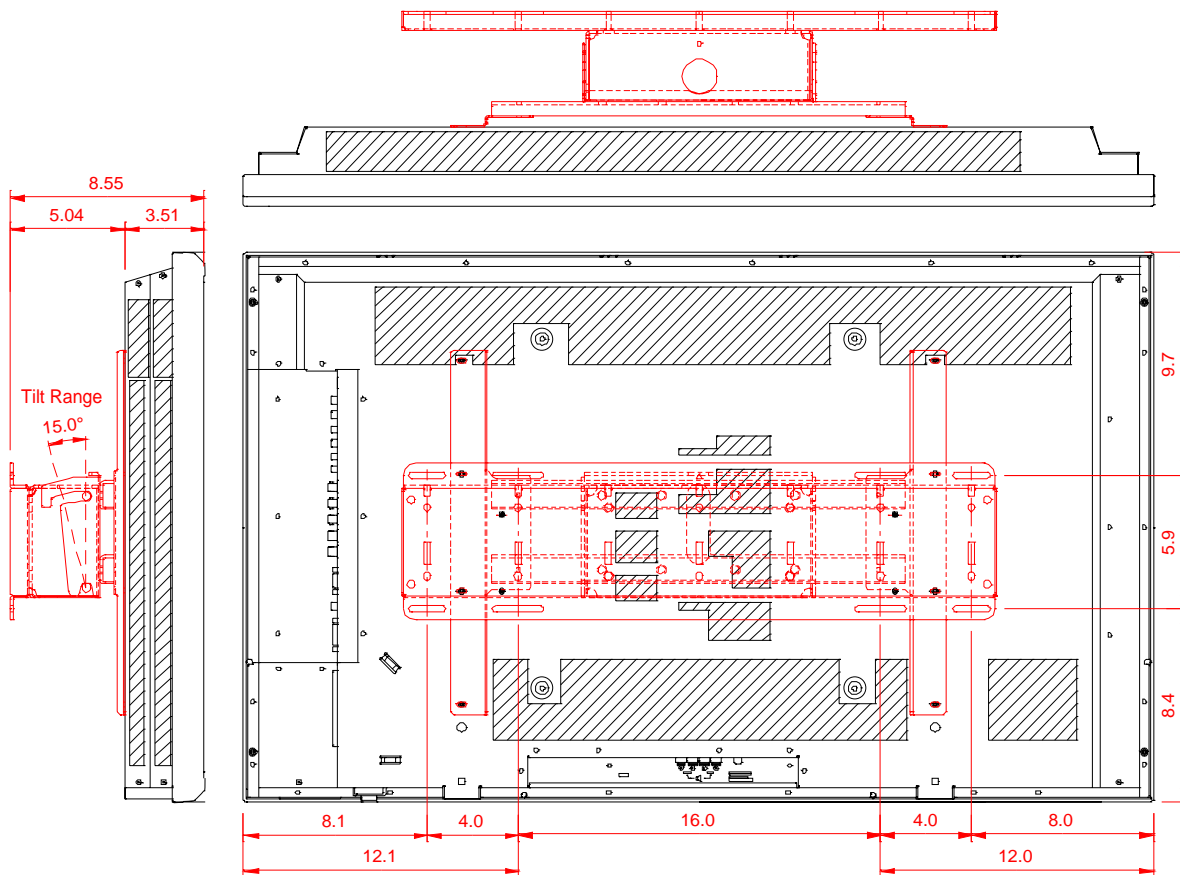

Note: The mount holes are higher on the 42VP4/42VP4D/42XM2 than on the prior units due to a higher center of gravity. (mount pattern is the same)
 42VP4/42VP4D/42XM2 mount holes are 0.24" higher than 42PD3(PX-42VP3)
 42VP4/42VP4D/42XM2 mount holes are 0.83" higher than 42MP3(PX-42V3)/42MP4(PX-42XM1)

Dimensions with optional Ceiling Mount Kit (CMK)

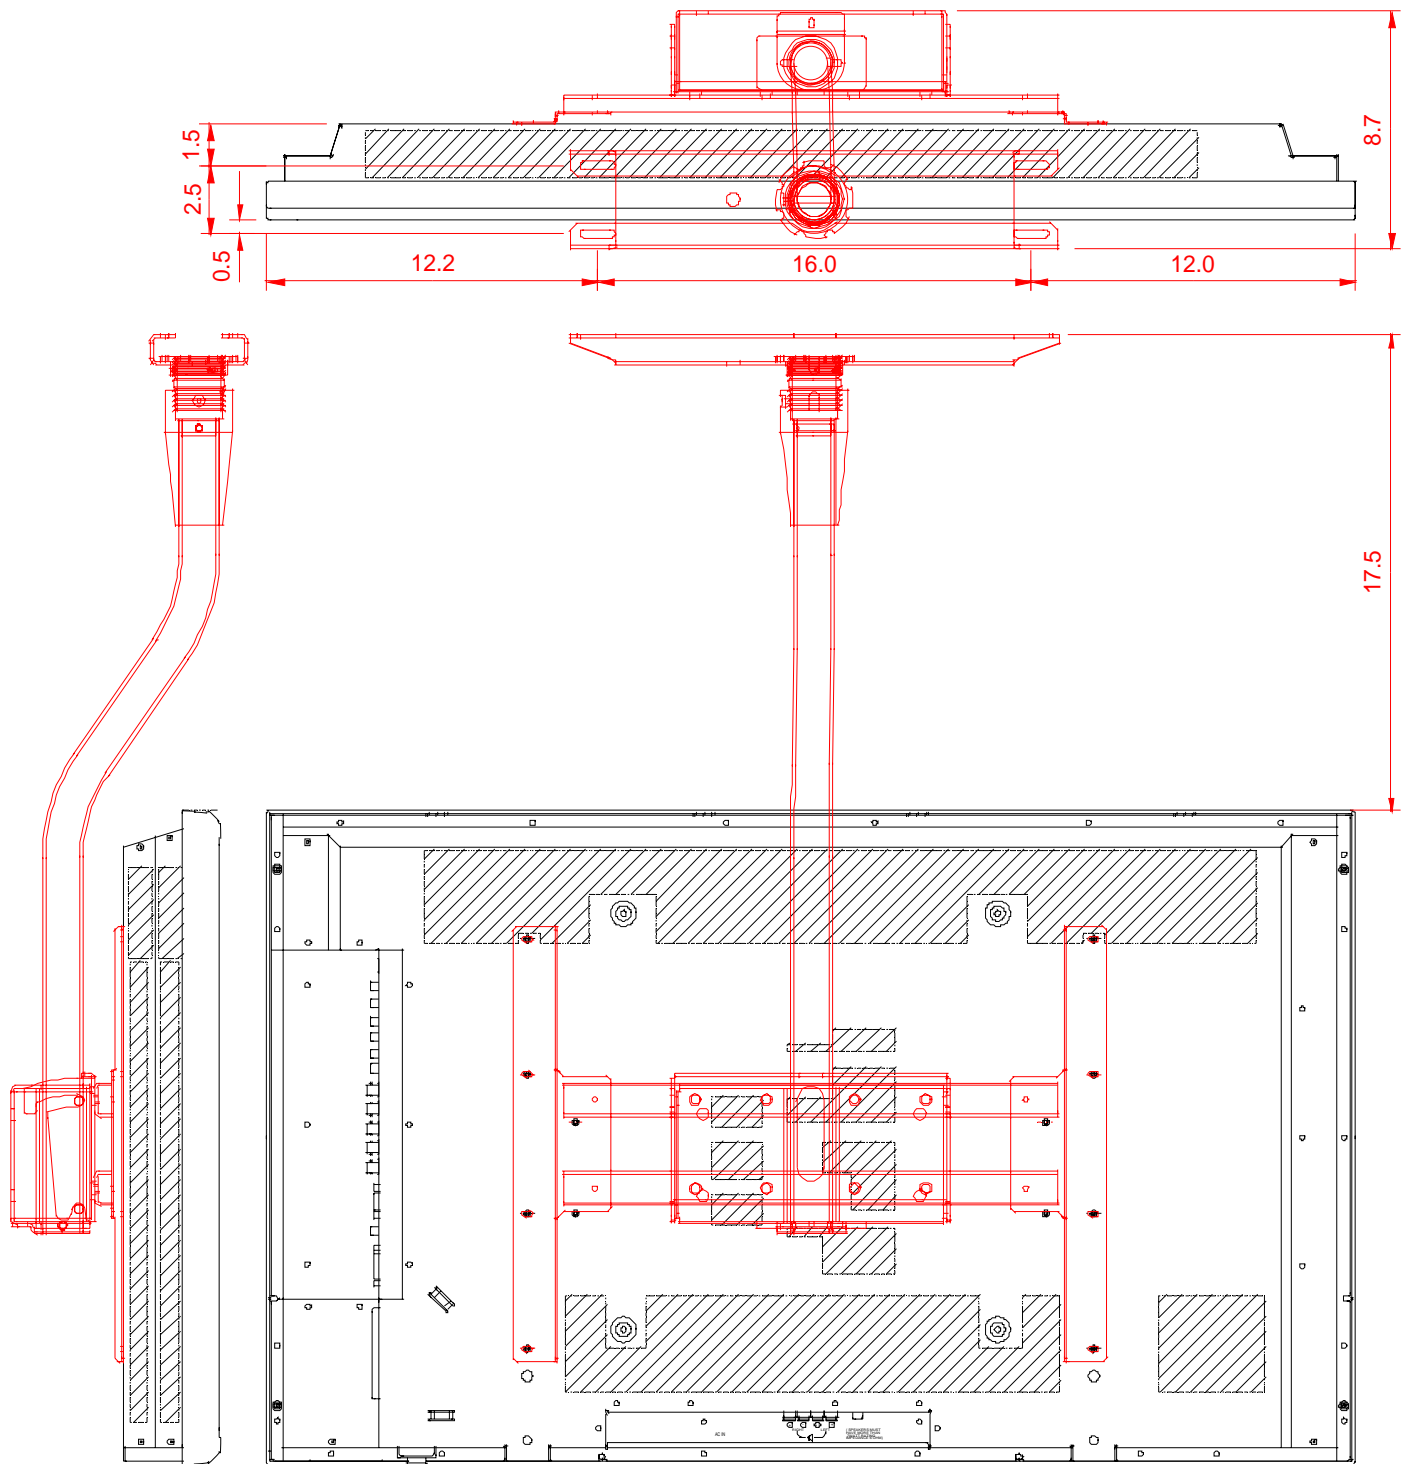


Note: The mount holes are higher on the 42VP4/42VP4D/42XM2 than on the prior units due to a higher center of gravity. (mount pattern is the same)
 42VP4/42VP4D/42XM2 mount holes are 0.24" higher than 42PD3(PX-42VP3)
 42VP4/42VP4D/42XM2 mount holes are 0.83" higher than 42MP3(PX-42V3)/42MP4(PX-42XM1)

Portrait Mode

Rotating the Display

The display must be rotated clockwise so the input panel is at the bottom and vents are at the top. Rotating the display counter-clockwise will not allow the unit to cool properly and will void the warranty.

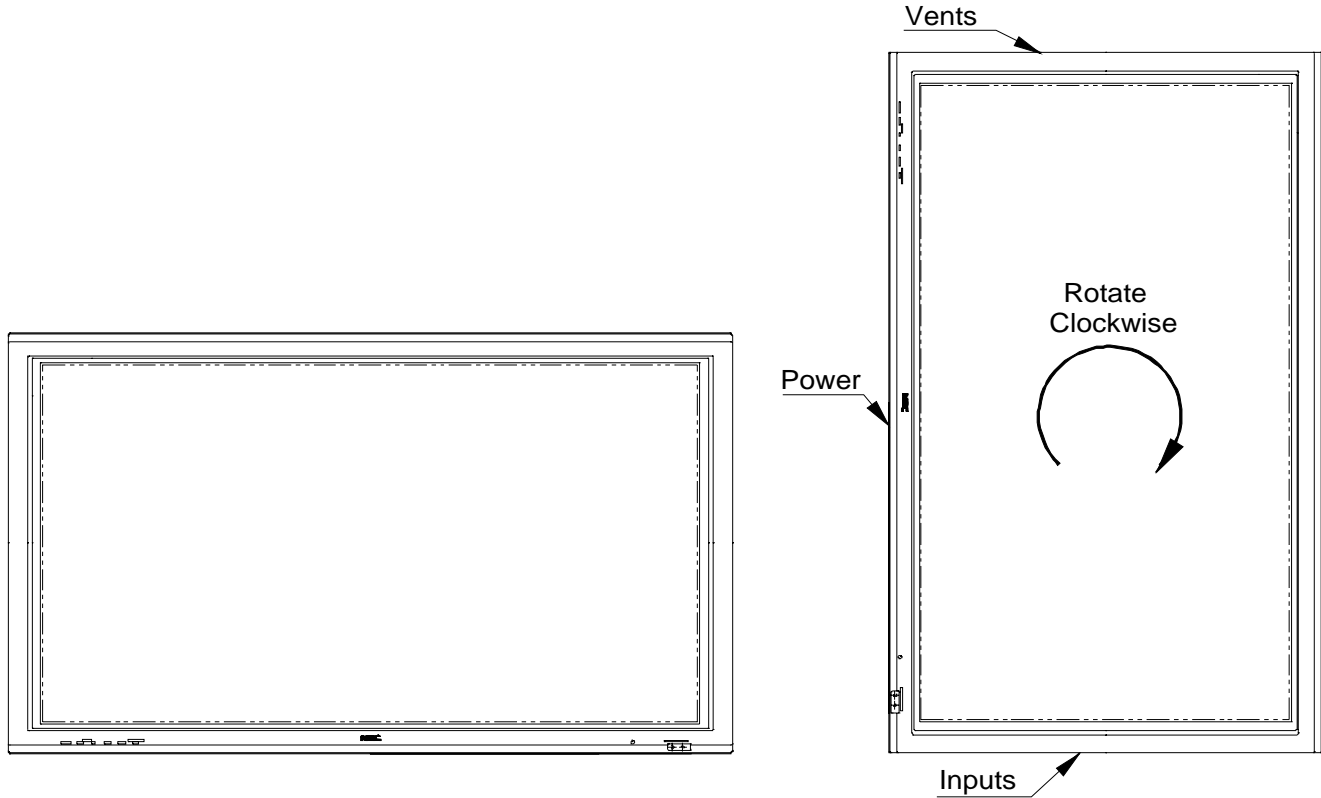

Rotating Source Content

Note: The display is not capable of rotating any source content.

PC




Pivot® software from Portrait Displays, Inc. (www.portrait.com) allows you to rotate the Windows operating system 90 degrees. This software installs in Windows on the PC and allows you to select landscape or rotate 90 degrees to portrait mode. Everything running in the Windows environment is also rotated.

Note: All displays connected to the PC will have to support rotating to portrait mode.

NTSC Video

NTSC Video has to be brought into a PC with the appropriate hardware and software, and sent back out through the PC graphics output. The method to rotate the video would then be the same as above and done within the PC Windows environment.

Connections

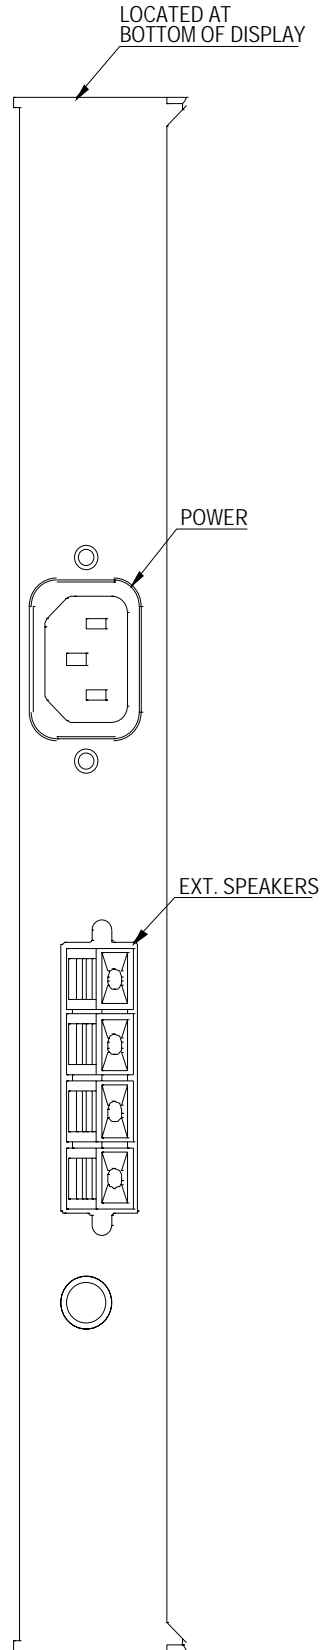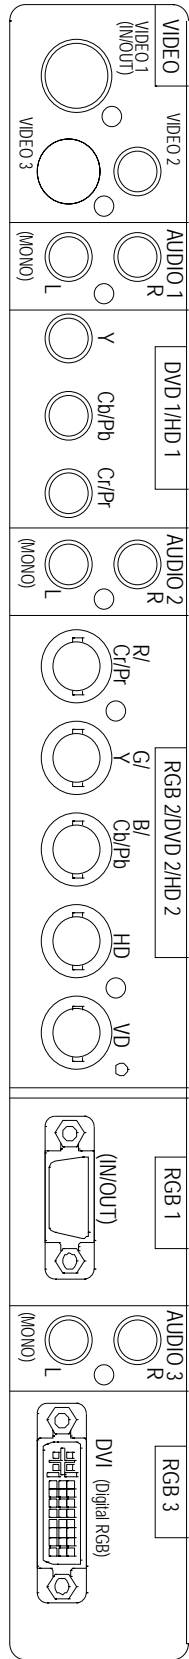

Control Codes

Function		Code Data							
POWER	ON	9FH	80H	60H	4EH	00H	CDH		
	OFF	9FH	80H	60H	4FH	00H	CEH		
INPUT SWITCH	VIDEO1 (BNC)	DFH	80H	60H	47H	01H	01H	08H	
	VIDEO2 (RCA)	DFH	80H	60H	47H	01H	02H	09H	
	VIDEO3 (S-Video)	DFH	80H	60H	47H	01H	03H	0AH	
	DVD1/HD1 (RCA/Component)	DFH	80H	60H	47H	01H	05H	0CH	
	DVD2/HD2 (5BNC/Component)	DFH	80H	60H	47H	01H	06H	0DH	
	RGB1 (15pin HD)	DFH	80H	60H	47H	01H	07H	0EH	
	RGB2 (5BNC/RGB)	DFH	80H	60H	47H	01H	08H	0FH	
AUDIO MUTE	ON	9FH	80H	60H	3EH	00H	BDH		
	OFF	9FH	80H	60H	3FH	00H	BEH		
PICTURE MODE	NORMAL	DFH	80H	60H	0AH	01H	01H	CBH	
	THEAT.1	DFH	80H	60H	0AH	01H	02H	CCH	
	THEAT.2	DFH	80H	60H	0AH	01H	03H	CDH	
	DEFAULT	DFH	80H	60H	0AH	01H	04H	CEH	
SCREEN MODE:	STADIUM	DFH	80H	60H	51H	01H	02H	13H	
	ZOOM	DFH	80H	60H	51H	01H	03H	14H	
	NORMAL	DFH	80H	60H	51H	01H	04H	15H	
	FULL	DFH	80H	60H	51H	01H	05H	16H	
AUTO PICTURE	ON	DFH	80H	60H	7FH	03H	03H	09H	00H 4DH
	OFF	DFH	80H	60H	7FH	03H	03H	09H	01H 4EH
CINEMA MODE	ON	DFH	80H	60H	C1H	01H	01H	82H	
	OFF	DFH	80H	60H	C1H	01H	02H	83H	

NOTE: Contact your NEC rep for codes not listed.


NOTE: Use a cross/reverse/null modem cable.

Cable Connection

Communication Protocol:

Interface:	RS-232C	Parity:	Odd
Communication:	Asynchronous	Stop Bit:	1 bit
Baud Rate:	9600 bps	Communication Code:	Hex
Data Length:	8 bits		

PC Control Connector (D-Sub 9P)

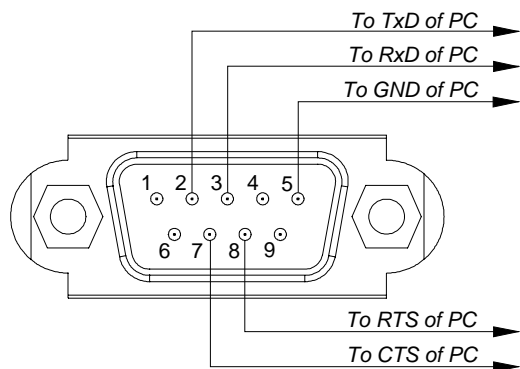

NOTE: Jumper "Request to send" and "Clear to Send" together on both ends of the cable to simplify cable connection.