

MT1065/1075 Installation Guide With Optional 2.7 - 4.2:1 Zoom Lens (MT60-26ZL)

v2.0

Contents

Product Description, Lens Specs,	
Screen/Aspect Ratio, Notes and Formulas	Pg. 1
Diagrams and Distance Charts, 4:3 Screens	Pg. 2
16:9 Screens	Pg. 3
Cabinet Dimensions, Top, Front and Right	Pg. 4
Bottom, Back and Left	Pg. 5
Ceiling Mount Dimensions	Pg. 6
Input Panel and Control Codes	Pg. 7



Product Description

Type:	3 panel LCD projector, 1.0" p-Si TFT w/MLA	Brightness:	MT1065 w/MT60-26ZL: 2900 ANSI lumens MT1075 w/MT60-26ZL: 3500 ANSI lumens
Resolution:	1024 x 768 (4:3) 1024 x 576 (16:9)	Dimensions:	13.14"(W) x 5.48"(H) x 12.71"(D)
		Weight:	13.2 lbs

Lens Specifications

Throw Ratio:	2.7 - 4.2:1(for 100" diagonal)	Focal Length:	53.8mm – 82.9mm
Offset Angle:	5.1°-8.0° (for 100" diagonal)	F/#:	2.04 – 2.80
Screen Sizes:	40"-500"	Power Zoom / Power Focus	

Screen/Aspect Ratio

Both 4:3 and 16:9 screens are fully supported with proper aspect ratio control for both type sources using NEC developed scaling technology. By selecting the screen type in the menus, Aspect Ratio control is reconfigured for that screen type.

- For a 4:3 screen; select "4:3" in the "Screen" menu for proper aspect ratio control of 4:3 and 16:9 sources.
- For a 16:9 screen; select "16:9" in the "Screen" menu for proper aspect ratio control of 4:3 and 16:9 sources.
*Factory default "Screen" setting is "4:3".

Notes

- For screen sizes not indicated on the projection charts, use the formulas below.
- If a value in a chart does not match the results of the formulas, use the values in the chart.
- The ceiling must be strong enough to support the projector and the installation must be in accordance with any local building codes.
- Distances are in inches, for millimeters multiply by 25.4.
- Distances may vary ±5%.

Formulas

The Projection Formulas use the image width for calculation. Image width is the same for all aspect ratios, only vertical image size varies. For proper projector placement, determine the image width for a desired screen size. Use the Screen Formulas below to calculate all screen dimensions. Plug in the image width for "W" in the Projection Formulas.

Refer to the diagrams and charts for popular screen sizes on page 2.

Definitions:

W = Image Width
H = Image Height (Size)
B = Vertical distance between lens center and screen center
C = Throw distance
 α = Projection angle

Projection Formulas:

B = 0.375W
C (wide) = 2.7264W – 5.276
C (tele) = 4.2864W – 5.354
 α (wide) = \tan^{-1} (B/C(wide))
 α (tele) = \tan^{-1} (B/C(tele))

4:3 Screen Formulas:

W = H x 4/3
H = W x 3/4
Screen Diagonal = W x 5/4

16:9 Screen Formulas:

W = H x 16/9
H = W x 9/16
Screen Diagonal = W x 18.358/16


Vertical Position for a 16:9 screen: The Vertical Position adjustment moves the 16:9 image up and down in the unused portion of the 4:3 panel. This adjustment is only available when the projector is set for '16:9' in the 'Screen' menu. The range of Vertical Position is dependent on aspect ratio and 3D Reform used. If 3D Reform is not used, the approximate range of Vertical Position is +/-0.167H (H=Screen Height) when using a 16:9 screen.

Note: To avoid premature lamp failure, do not tilt the front of the projector up or down by more than 75° from level. Tilting the front of the projector up or down from 15° to 75° might reduce lamp life by up to 25%.


4:3 Screens

The following diagrams show the relationship between projector position and the screen. Refer to the chart below for data. Distances are in inches. For millimeters multiply by 25.4.

Ceiling Mounted

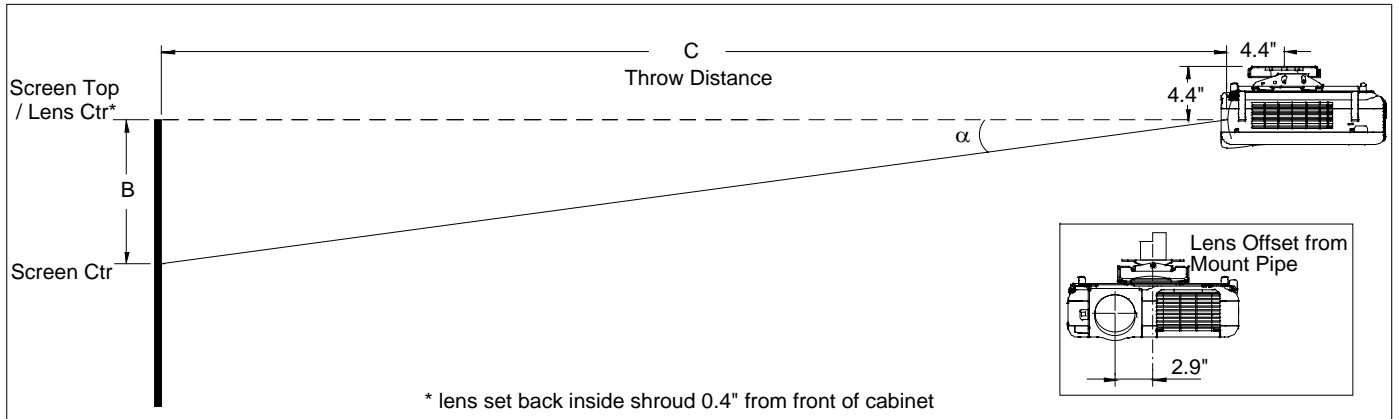

Desktop

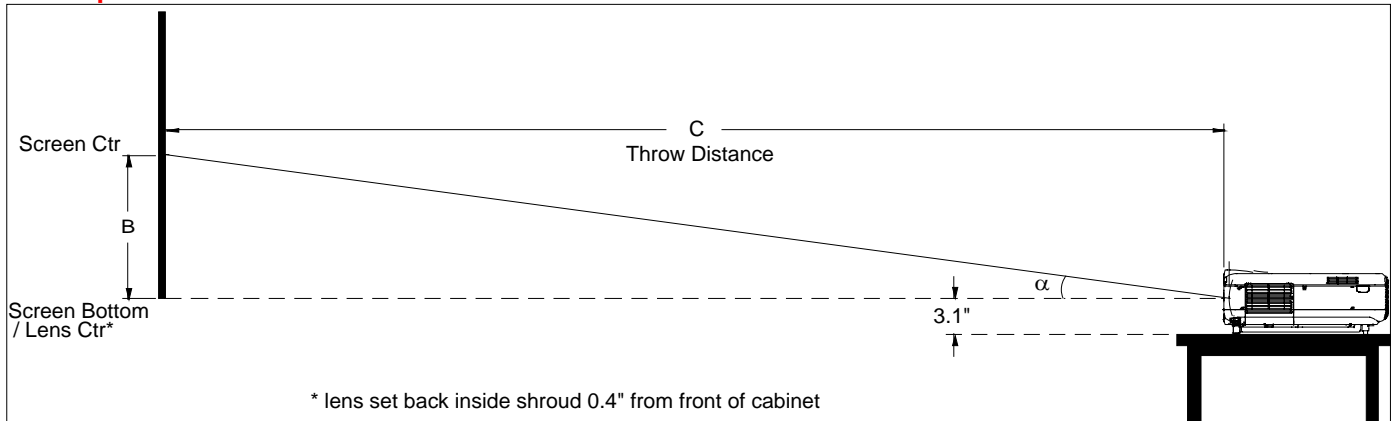

Note: To avoid premature lamp failure, do not tilt the front of the projector up or down by more than 75° from level. Tilting the front of the projector up or down from 15° to 75° might reduce lamp life by up to 25%.

Distance chart for popular 4:3 screens

Screen Size (4:3)			B	C	α
Diag	W	H			
inches	inches	inches	inches	wide - tele inches	wide - tele degrees
40	32	24	12.0	82.0 - 131.8	8.3 - 5.2
60	48	36	18.0	125.6 - 200.4	8.2 - 5.1
72	57.6	43.2	21.6	151.8 - 241.5	8.1 - 5.1
84	67.2	50.4	25.2	177.9 - 282.7	8.1 - 5.1
90	72	54	27.0	191.0 - 303.3	8.0 - 5.1
100	80	60	30.0	212.8 - 337.6	8.0 - 5.1
120	96	72	36.0	256.5 - 406.1	8.0 - 5.1
150	120	90	45.0	321.9 - 509.0	8.0 - 5.1
180	144	108	54.0	387.3 - 611.9	7.9 - 5.0
200	160	120	60.0	430.9 - 680.5	7.9 - 5.0
250	200	150	75.0	540.0 - 851.9	7.9 - 5.0
300	240	180	90.0	649.1 - 1023.4	7.9 - 5.0
350	280	210	105.0	758.1 - NA	7.9 - NA
400	320	240	120.0	867.2 - NA	7.9 - NA
450	360	270	135.0	976.2 - NA	7.9 - NA
500	400	300	150.0	1085.3 - NA	7.9 - NA


Note: For screen sizes not indicated on the chart, use the formulas on page 1.

Note: "NA" means it is outside the lens range for that part of the zoom. Refer to "Screen Sizes" in Lens Specifications on Page 1.


16:9 Screens

The following diagram shows the relationship between projector position and the screen. Refer to the chart below for data. Distances are in inches. For millimeters multiply by 25.4.

Ceiling Mounted

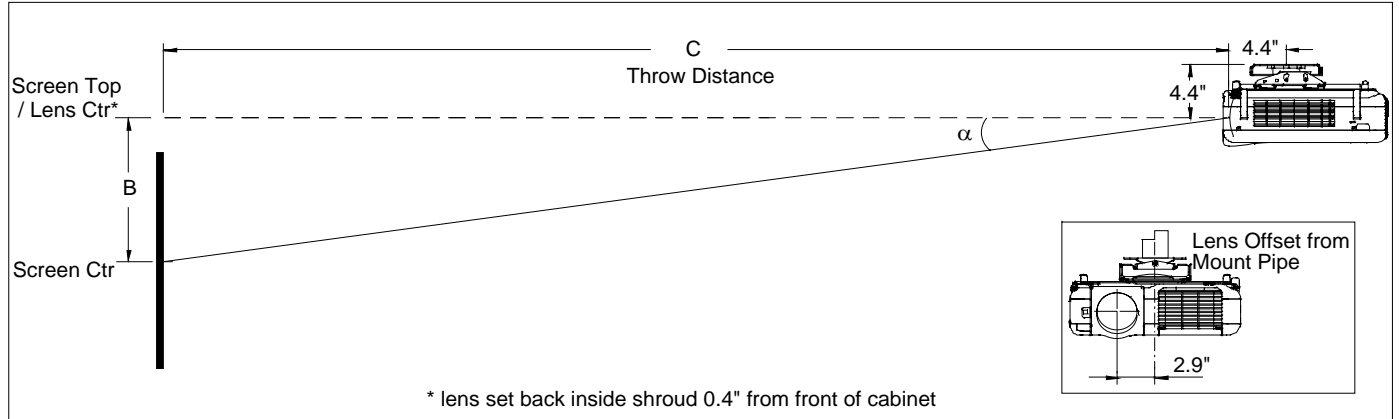

Desktop

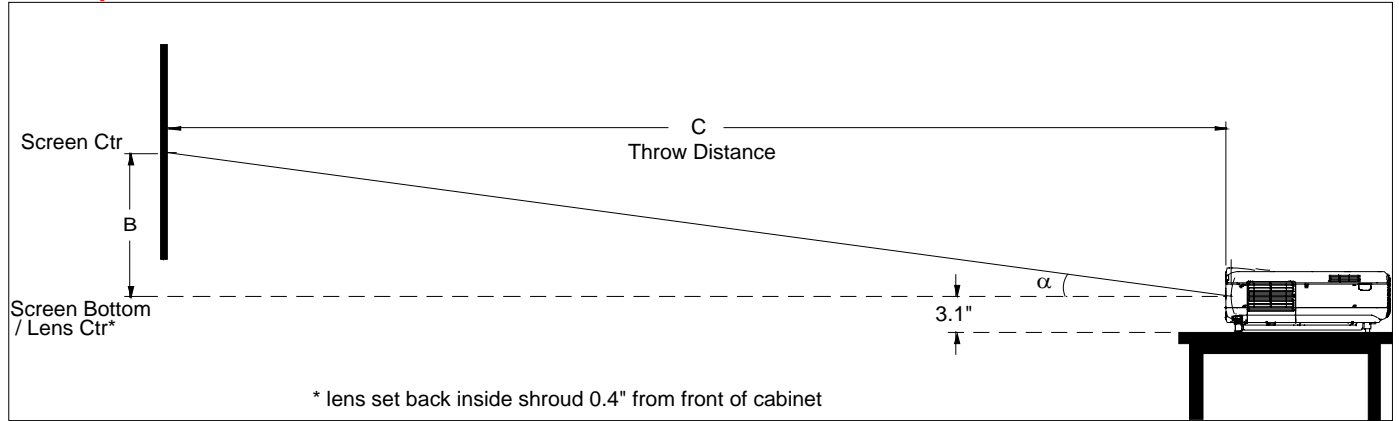

Note: To avoid premature lamp failure, do not tilt the front of the projector up or down by more than 75° from level. Tilting the front of the projector up or down from 15° to 75° might reduce lamp life by up to 25%.

Distance chart for popular 16:9 screens

Screen Size (16:9)			B	C	α
Diag	W	H			
inches	inches	inches	inches	wide - tele inches	wide - tele degrees
82.6	72	40.5	27.0	191.0 - 303.3	8.0 - 5.1
92	80	45	30.0	212.8 - 337.6	8.0 - 5.1
100	87	49	32.6	231.9 367.6	8.0 5.1
106	92	52	34.5	245.6 389.0	8.0 5.1
110	96	54	36.0	256.5 - 406.1	8.0 - 5.1
119	104	58.5	39.0	278.3 - 440.4	8.0 - 5.1
123	107	60	40.1	286.4 - 453.3	8.0 - 5.1
133	116	65	43.5	311.0 - 491.9	8.0 - 5.1
135	118	66	44.3	316.4 - 500.4	8.0 - 5.1
159.5	139	78	52.1	373.7 - 590.5	7.9 - 5.0
161	140	79	52.5	376.4 - 594.7	7.9 - 5.0
229.5	200	112.5	75.0	540.0 - 851.9	7.9 - 5.0
275	240	135	90.0	649.1 - 1023.4	7.9 - 5.0
321	280	157.5	105.0	758.1 - NA	7.9 - NA
367	320	180	120.0	867.2 - NA	7.9 - NA
459	400	225	150.0	1085.3 - NA	7.9 - NA

Vertical Position for a 16:9 screen


The Vertical Position adjustment moves the 16:9 image up and down in the unused portion of the 4:3 panel. This adjustment is only available when the projector is set for '16:9' in the 'Screen' menu. The range of Vertical Position is dependent on aspect ratio and 3D Reform used. If 3D Reform is not used, the approximate range of Vertical Position is +/-0.167H (H=Screen Height) when using a 16:9 screen.

Note: For screen sizes not indicated on the chart, use the formulas on page 1.

Note: "NA" means it is outside the lens range for that part of the zoom. Refer to "Screen Sizes" in Lens Specifications on Page 1.


Cabinet Dimensions

The following drawings show the cabinet dimensions.
Dimensions are in inches. For millimeters multiply by 25.4.

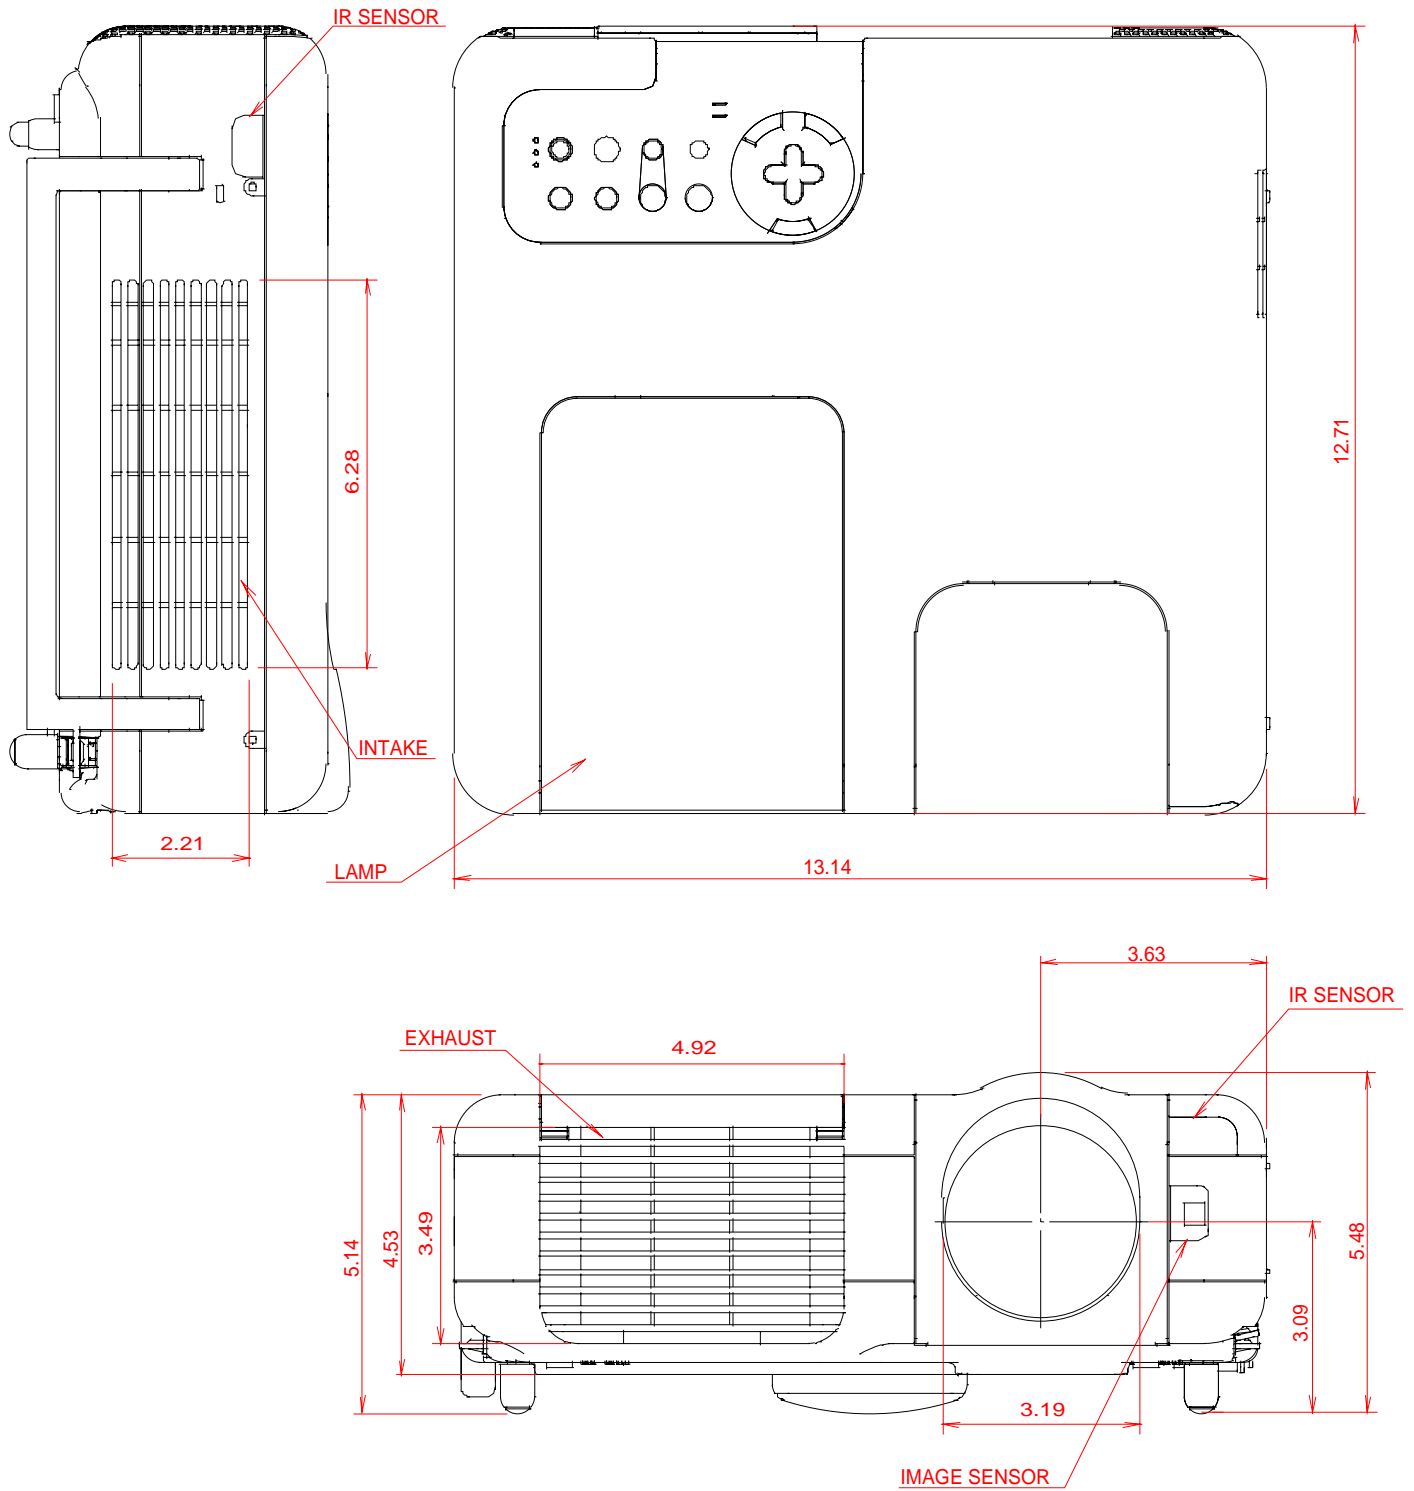






Cabinet Dimensions (continued)

The following drawings show the cabinet dimensions.
Dimensions are in inches. For millimeters multiply by 25.4.

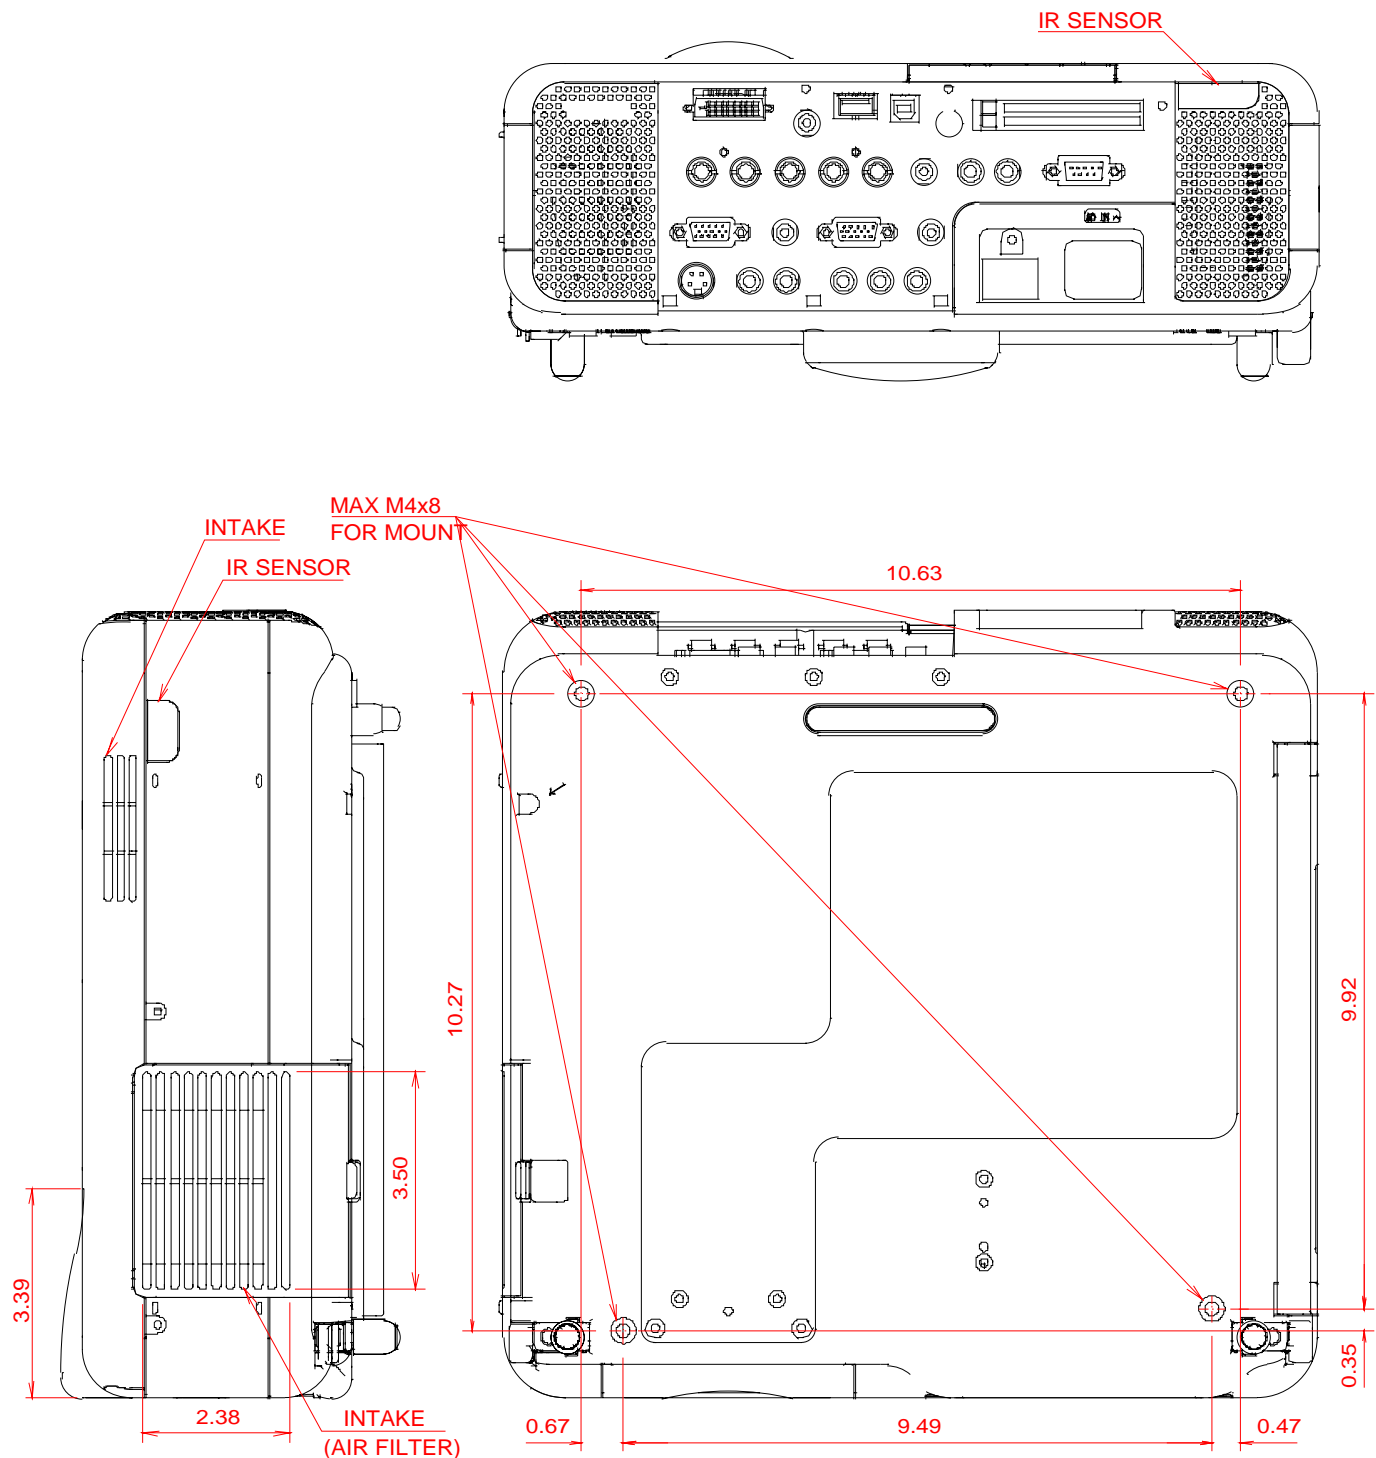


Optional Ceiling Mount Dimensions (Model #: MT60CM)

The following drawings show ceiling mount dimensions.
Dimensions are in inches. For millimeters multiply by 25.4.

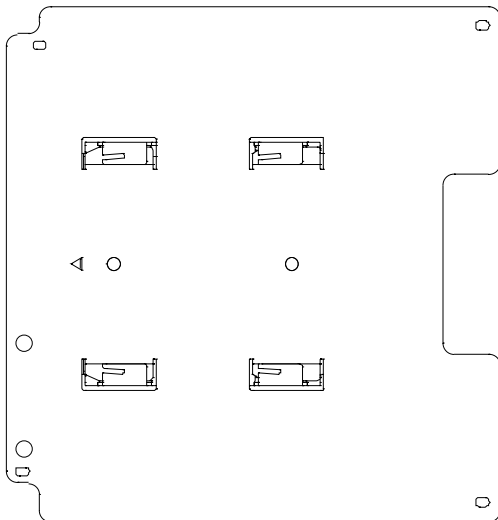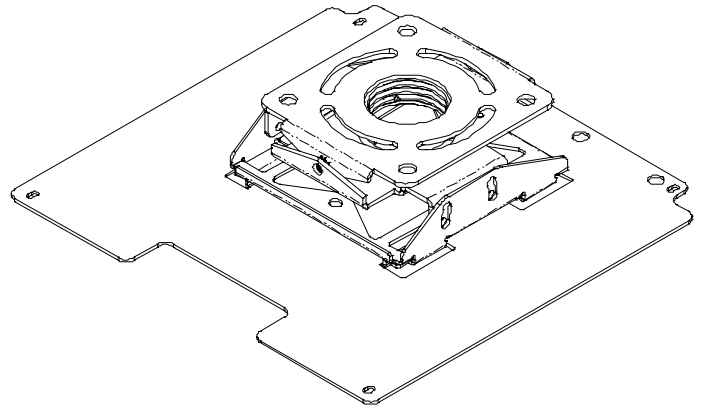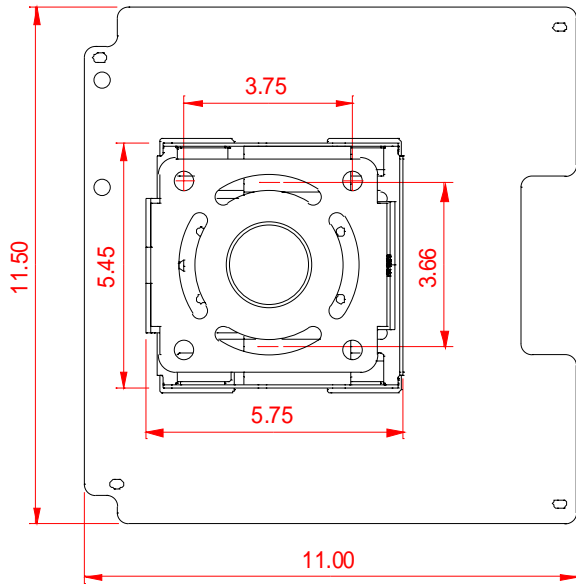

Input Panel

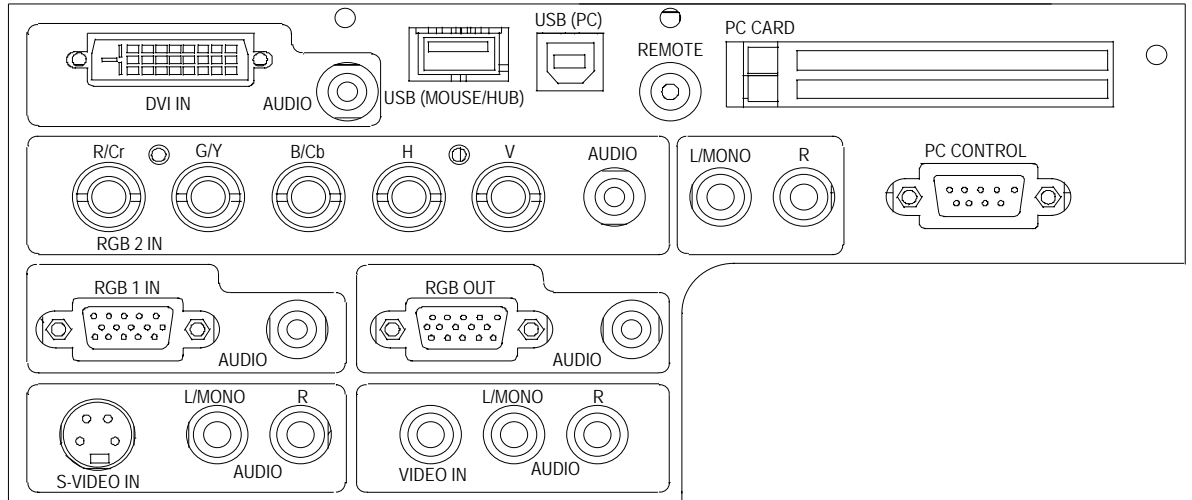

Control Codes

Function	Code Data
POWER ON	02H 00H 00H 00H 00H 02H
POWER OFF	02H 01H 00H 00H 00H 03H
INPUT SELECT RGB 1	02H 03H 00H 00H 02H 01H 01H 09H
INPUT SELECT RGB 2	02H 03H 00H 00H 02H 01H 02H 0AH
INPUT SELECT VIDEO	02H 03H 00H 00H 02H 01H 06H 0EH
INPUT SELECT S-VIDEO	02H 03H 00H 00H 02H 01H 0BH 13H
INPUT SELECT DVI (DIGITAL)	02H 03H 00H 00H 02H 01H 1AH 22H
INPUT SELECT VIEWER	02H 03H 00H 00H 02H 01H 1FH 27H
PICTURE MUTE ON	02H 10H 00H 00H 00H 12H
PICTURE MUTE OFF	02H 11H 00H 00H 00H 13H
SOUND MUTE ON	02H 12H 00H 00H 00H 14H
SOUND MUTE OFF	02H 13H 00H 00H 00H 15H
ON SCREEN MUTE ON	02H 14H 00H 00H 00H 16H
ON SCREEN MUTE OFF	02H 15H 00H 00H 00H 17H
ASPECT RATIO (4:3 Screen)	4:3 03H 10H 00H 00H 05H 18H 00H 00H 00H 00H 30H
	Letterbox 03H 10H 00H 00H 05H 18H 00H 00H 01H 00H 31H
	Widescreen 03H 10H 00H 00H 05H 18H 00H 00H 02H 00H 32H
	Crop 03H 10H 00H 00H 05H 18H 00H 00H 03H 00H 33H
ASPECT RATIO (16:9 Screen)	4:3 Window 03H 10H 00H 00H 05H 18H 00H 00H 00H 00H 30H
	Letterbox 03H 10H 00H 00H 05H 18H 00H 00H 01H 00H 31H
	Widescreen 03H 10H 00H 00H 05H 18H 00H 00H 02H 00H 32H
	4:3 Fill 03H 10H 00H 00H 05H 18H 00H 00H 04H 00H 34H
AUTO ADJUST	02H 0FH 00H 00H 02H DDH 00H F0H


NOTE: Contact your NEC rep for codes not listed.

Cable Connection

Communication Protocol:

Baud Rate: 38400 bps
 Data Length: 8 bits
 Parity: No Parity
 Stop Bit: One bit
 X on/off: None
 Communications: Full duplex

PC Control Connector (D-Sub 9P)

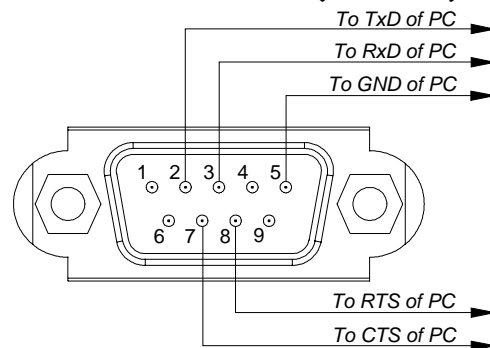

NOTE 1: It is recommended to set the projector to "Idle Mode" in the Setup/Standby Mode menu for best Power ON response.

NOTE 2: Pins 1, 4, 6, and 9 are used inside the projector.

NOTE 3: Jumper "Request to send" and "Clear to Send" together on both ends of the cable to simplify cable connection.

NOTE 4: For long cable runs it is recommended to set communication speed within projector menus to 9600 bps.